





WARNING!

- READ THE PROVIDED INSTRUCTIONS PRIOR TO INSTALLING.
- INSTALLATION SHOULD BE CARRIED OUT BY QUALIFIED INSTALLERS.
- THE INSTALLER HAS THE FINAL RESPONSIBILITY FOR THE STRENGTH AND RIGIDITY OF THE WALL/CEILING STRUCTURE.
- A MINIMUM OF 2 PEOPLE REQUIRED WHEN INSTALLING LONG LENGTH FIXTURES.

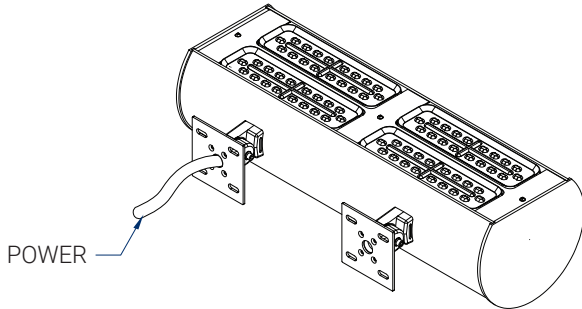


POWER

LUMINAIRE SHOWN AS AN UPLIGHT

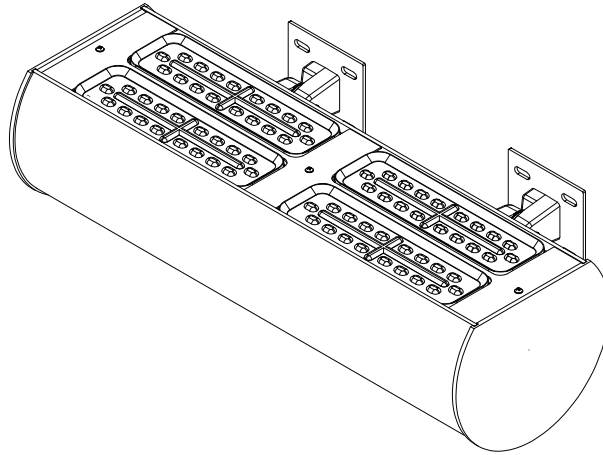

* 24" FIXTURE WILL HAVE (2) SWIVEL MOUNTS

MOUNT DIMENSIONS

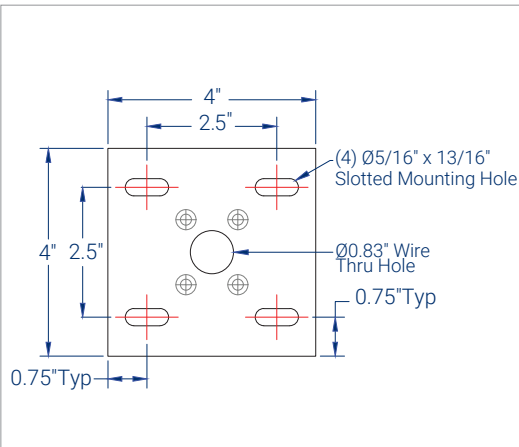

PACKAGE INCLUDES

Swivel(s) with Plate




Washer(s)



Swivel Screw(s)



Ziro®1500
Fixture(s)
w/ Extrusion
Swivel(s)



ITEMS NEEDED (BY OTHERS)

Hex Wrench




Mounting
Hardware



Hand Drill
+ Drill Bit(s)





ISOMETRIC VIEW

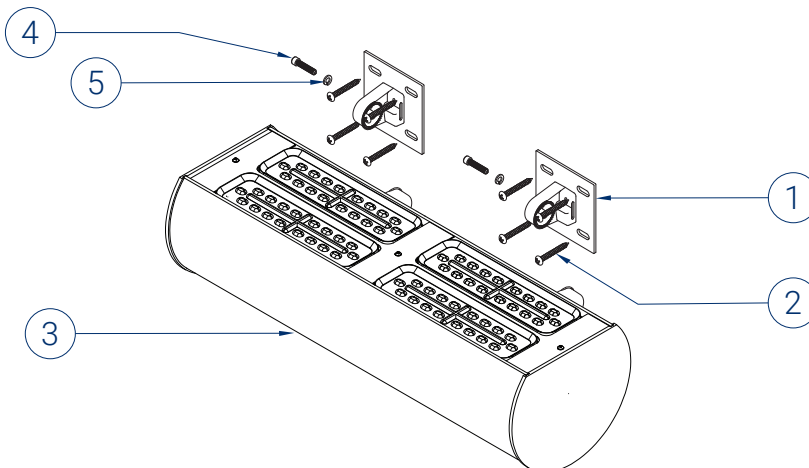

- (1) Swivel Mount with Plate
- (2) Mounting Hardware (by others)
- (3) Ziro® 1500 Fixture with Extrusion Swivel(s)
- (4) Swivel Screw
- (5) Washer

1 MOUNT SWIVEL PLATE(S) TO SURFACE


- INSERT MOUNTING HARDWARE THROUGH THE SLOTTED MOUNTING HOLES ONTO DESIRED SURFACE UNTIL SECURE.

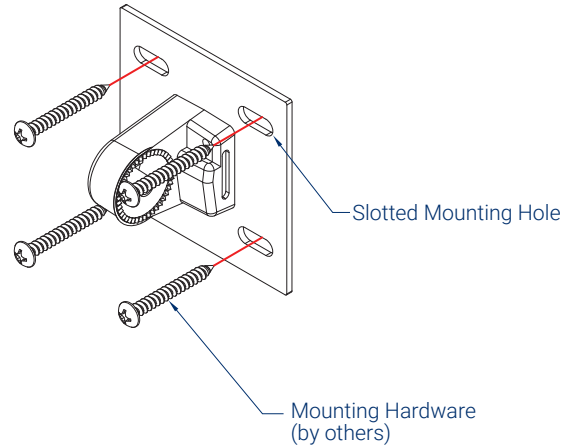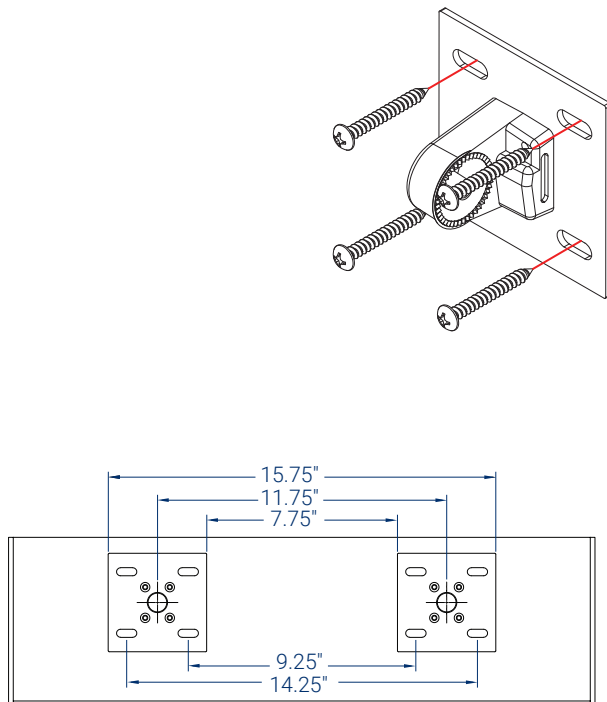


FRONT VIEW

2 FEED WIRE THRU AND ATTACH SWIVEL(S)

- FEED WIRE FROM EXTRUSION SWIVEL ON THE LEFT SIDE OF THE FIXTURE, INTO WIRE THRU HOLE ON THE SWIVEL MOUNT PLATE.
- ATTACH EXTRUSION SWIVEL ONTO SWIVEL MOUNT, FOR BOTH SWIVEL MOUNTS.
- USE THE SWIVEL SCREWS AND WASHERS TO LOOSELY ATTACH THE MOUNTS TOGETHER.
- THE WASHER PRECEDES THE SCREW (SEE ILLUSTRATION).

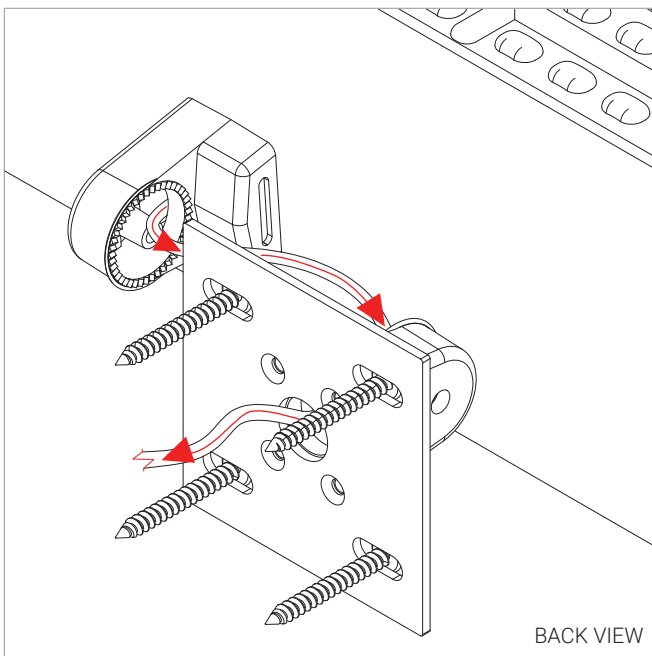


BACK VIEW

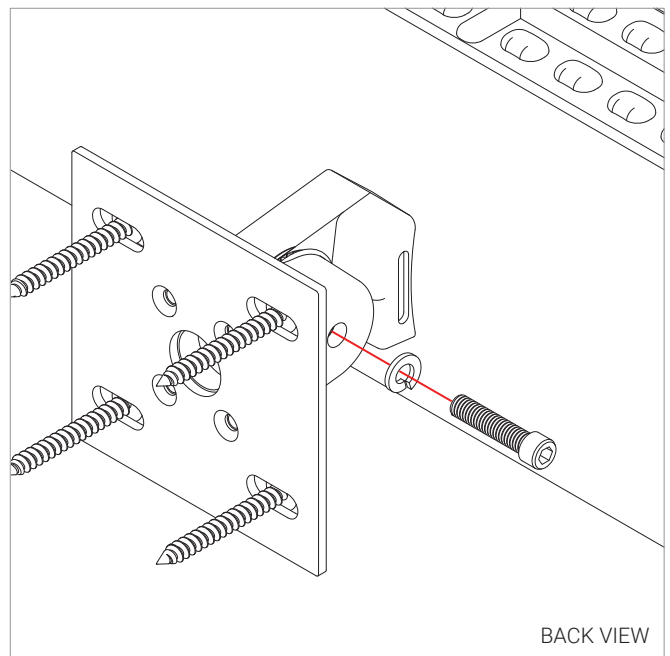

BACK VIEW

3 SELECT DESIRED ANGLE

- ROTATE AND TILT THE FIXTURE INTO DESIRED DEGREE ANGLE AND TIGHTEN SWIVEL SCREW(S) ON BOTH SWIVELS.

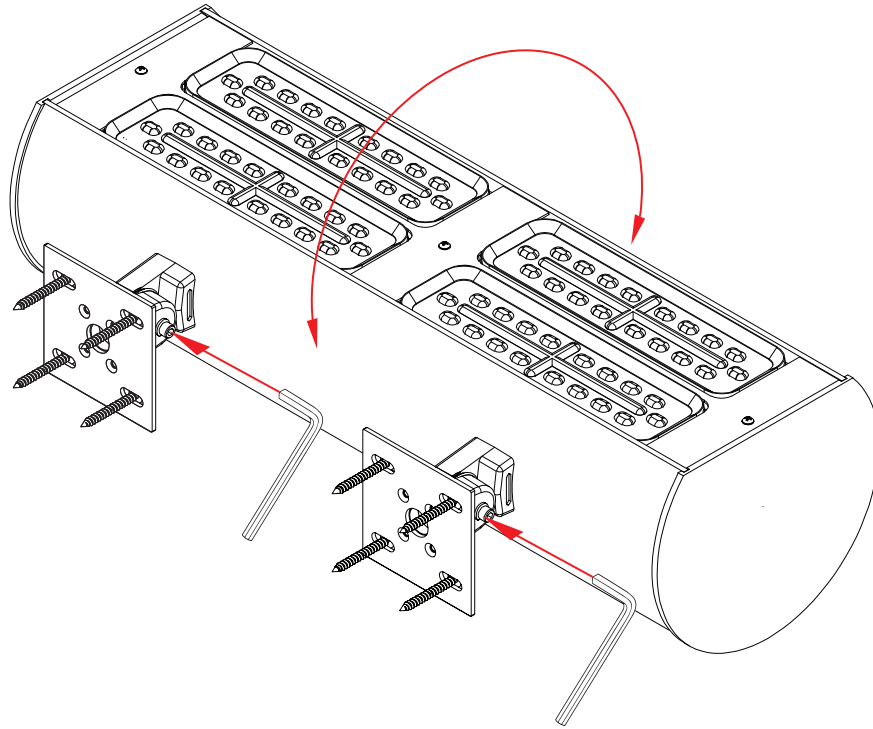

BACK VIEW