

Gulfstream 4® RGBW

Gulfstream 4®/EX RGBW

Spotlight LED

120-277V AC | IP67



ORGATECH®

Compact Design

Rotate + Tilt System

IP67 Protection

DMX / RDM

Various Optics & Glare Control

Flexible Installation



The Gulfstream 4® RGBW is a color changing, 204W LED Spotlight. The fixture is precision engineered 1.97" Wide profile to discreetly integrate into any architectural design while providing extremely powerful color changing illumination.

The Gulfstream 4 uses an array of optics to optimize the performance and lumens for grazing and wallwash applications.

Technical Specifications

Product	GS4-9*	GS4-18	GS4-27
	GS4EX-36	GS4EX-54	GS4EX-72
Voltage	120V- 277V AC		
Wattage	30W	55W	81W
RGBW/EX	105W	154W	204W
Efficacy	Up to 43 lm/W		
Lumens**	1130lm	2260lm	3390lm
RGBW/EX	4530lm	6790lm	9060lm
Dimensions (LxWxH)	4.96"x2.44"x8.27"	8.35"x2.44"x8.27"	11.73"x2.44"x8.27"
RGBW/EX	8.35"x2.44"x11.8"	11.73"x2.44"x11.8"	17.8"x2.44"x11.8"
Weight	2.65 lbs(1.2Kg)	4.63 lbs(2.10Kg)	5.95 lbs(2.7Kg)
RGBW/EX	9.26 lbs(4.2Kg)	11.9 lbs(5.4Kg)	17.2 lbs(7.8Kg)
**RGBW based on RGBW30K/10° optics. RGBW/EX based on RGBW30K/14° optics			
Operating Temp	min -20°C (-5°F) / max 50°C (122°F)		
Storage Temp	min -30°C (-22°F) / max 80°C (176°F)		
Optics	6° / 10° / 20° / 40° / 20°x 40°		
RGBW/EX	8° / 14° / 20° / 40° / 20°x 40°		
CCT	RGBW2700K / RGBW3000K / RGBW4000K / RGBW5000K / RGBW6500K		
Color rendering index	80+		
Control	DMX with RDM, PWM*		
LED lifetime	LM90 ≤ 51,400h		
Housing	Extruded & die-casted aluminum / Tempered glass lens		
Finish	Dark gray		
Ingress	IP67		


*9 LED remote PWM driver only

GULFSTREAM 4 - RGBW

ORDERING GUIDE Make selections by filling out the top row or highlighting options.

GS4							
SERIES	LED QTY	CCT	VOLTAGE	CONTROLS	OPTICS	MOUNTING	ACCESSORY
GS4	9	RGBW27K	U 120-277V	DMX/RDM	6	AB ANCHOR BASE	SFT SOFTENER
GULFSTREAM 4	18	RGBW30K		PWM*	10	GS GROUND SPIKE	MLV MICRO LOUVER
	27	RGBW40K		ND	20	PP PERMAPOST	WDH WIDE OPTIC - HORIZONTAL
		RGBW50K		NON DIMMING	40	PM POLE MOUNT	WDV WIDE OPTIC - VERTICAL
		RGBW65K			20x40	CU CUSTOM	N NONE

*PWM - Wireless Casambi Control **PWM available for 9 LED remote driver only

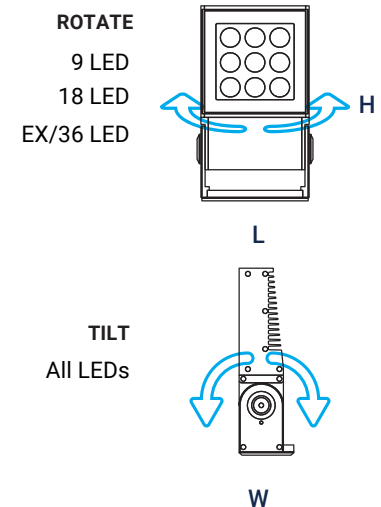

GULFSTREAM 4/ EX - RGBW


ORDERING GUIDE Make selections by filling out the top row or highlighting options.

GS4EX							
SERIES	LED QTY	CCT	VOLTAGE	CONTROLS	OPTICS	MOUNTING	ACCESORY
GS4EX GULFSTREAM 4 EX	36 54 72	RGBW27K RGBW30K RGBW40K RGBW50K RGBW65K	U 120-277V	DMX/RDM ND NON DIMMING	8 14 20 40 20x40	AB ANCHOR BASE GS GROUND SPIKE PP PERMAPOST PM POLE MOUNT CU CUSTOM	SFT SOFTENER MLV MICRO LOUVER WDH WIDE OPTIC - HORIZONTAL WDV WIDE OPTIC - VERTICAL N NONE

DIMENSIONS


Gulfstream 4 RGBW

9 LED*




Length 4.96in (126mm)

18 LED




Length 8.35in (212mm)

27 LED



Length 11.73in (298mm)

1.97in (50.03mm)




Height
8.27in (210.1mm)

Width 2.44in (62mm)


Gulfstream 4 / EX RGBW

36 LED




Length 8.3in (212mm)

54 LED



Length 11.7in (298mm)

72 LED



Length 17.8in (451mm)

2in (50mm)




Height
11.8in (300mm)

Width 2.4in (62mm)

Specifications may be modified or improved without notification.


LUMINAIRE ACCESSORIES

RGBW




Optics	9 LED	18 LED	27 LED
6°	950lm	1900lm	2860lm
10°	1130lm	2260lm	3390lm
20°	1090lm	2180lm	3270lm
40°	1020lm	2040lm	3070lm
20°x40°	820lm	1650lm	2470lm

RGBW + SOFTENER




Optics	9 LED	18 LED	27 LED
10°	1020lm	2030lm	3050lm
20°	980lm	1960lm	2950lm
40°	920lm	1840lm	2760lm
20°x40°	740lm	1480lm	2230lm

RGBW + WIDE OPTIC



Optics	9 LED	18 LED	27 LED
10°	850lm	1690lm	2540lm
20°	820lm	1630lm	2450lm
40°	760lm	1530lm	2300lm
20°x40°	610lm	1230lm	1850lm

RGBW + MICRO LOUVER




Optics	9 LED	18 LED	27 LED
10°	560lm	1130lm	1690lm
20°	410lm	820lm	1230lm
40°	510lm	1020lm	1530lm
20°x40°	410lm	820lm	1230lm

Gulfstream 4®/EX RGBW

ORGATECH®


LUMINAIRE ACCESSORIES

RGBW/EX




Optics	36 LED	54 LED	72 LED
8°	4620lm	6930lm	9240lm
14°	4530lm	6790lm	9060lm
20°	4370lm	6555lm	8740lm
40°	4090lm	6140lm	8180lm
20°x40°	3300lm	4950lm	6600lm

RGBW/EX + SOFTENER




Optics	36 LED	54 LED	72 LED
14°	4070lm	6110lm	8150lm
20°	3930lm	5890lm	7860lm
40°	3680lm	5520lm	7360lm
20°x40°	2970lm	4450lm	5940lm

RGBW/EX + WIDE OPTIC



Optics	36 LED	54 LED	72 LED
14°	3390lm	5090lm	6790lm
20°	3270lm	4910lm	6550lm
40°	3060lm	4600lm	6130lm
20°x40°	2470lm	3710lm	4950lm

RGBW/EX + MICRO LOUVER



Optics	36 LED	54 LED	72 LED
14°	2260lm	3390lm	4530lm
20°	2180lm	3270lm	4370lm
40°	2040lm	3070lm	4090lm
20°x40°	1650lm	2470lm	3300lm

MOUNTINGS



ANCHOR BASE

For surface and retrofit mounting


MATERIAL	Anodized Aluminum
DIMENSION (LxWxH)	7.9x2.4x0.3in(200x62x8.65mm) / 11.3x2.4x0.3in (286x62x8.65mm) 14.6x2.4x0.3in (372x62x8.65mm) / 18x2.4x0.3in (458x62x8.65mm)



GROUND SPIKE

For above grade mounting

MATERIAL	Powder Coated Aluminum
DIMENSION	Ø1.8 x 10.2in (Ø45 x H260mm)

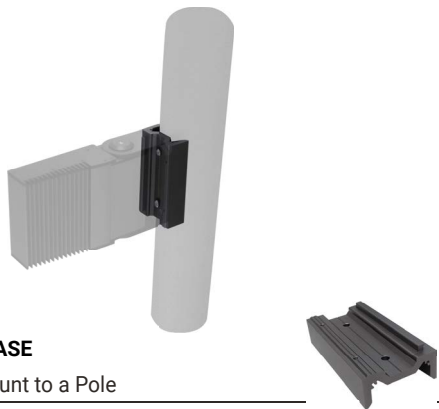

POLE MOUNT BASE

Base plate to mount to a Pole

MATERIAL	Anodized Aluminum
DIMENSION (LxWxH)	4.6x2.4x1.2in (116x62x31.15mm) / 8x2.4x1.2in (202x62x31.15mm) 11.3x2.4x1.2in (288x62x31.15mm) / 14.7x2.4x1.2in (374x62x31.15mm)

GS4 - MOUNTING ACCESSORIES

PART #	DESCRIPTION
GS4-JBOX	GS4 -JUNCTION BOX

ELECTRICAL DETAILS

RGB/RGBW | 120-277V AC

*Custom cord lengths available **GS4-JBOX required for daisy chain

