

Ziro 1500 Cathedral Series

Indirect or Wallwash

120-277VAC



Project
Date

Fixture	Available Length	Watts	Lumen Output
L35	14" & 18"	35W	3,825lm
L55	14" & 18"	55W	5,185lm
L70	18" & 24"	70W	7,650lm
L110	18" & 24"	110W	10,370lm
L140	24"	140W	15,300lm
L220	24"	220W	20,740lm
L240	24"	240W	37,800lm



DESCRIPTION

The Ziro produces powerful indirect LED illumination using the latest High Efficiency LEDs to their true advantage. Energy efficiency combined with the well-known visual performance benefits of indirect lighting eliminates the hazards and discomfort of LED glare. Our new indirect illuminators out-perform other LED fixtures and produce up to a 50% energy savings. Our cool running fixtures with integral drivers compliment architectural elements while making their own discrete statement.

FEATURES

Construction	Extruded Aluminum w/ Aluminum Endcaps & Stainless Steel Hardware.
Length (nom.)	14" / 18" / 24"
CCT	3000K, 3500K, 4000K, 5000K
Dimming	Non-dimming, 0-10V Dimming
Optics	Forward throw
Mounting	Swivel Mount, Yoke Mount, Pendant-Single, Double, Triple, Quad
Finish	Powder Coated White, Black, Bronze, Silver, Custom, Marine Grade

PERFORMANCE

Electrical	120-277V AC. Integral
LED Output	14" & 18"-35W, 55W 18" & 24"-70W, 110W 24"-140W, 220W, 240W
Environment	Wet Location - IP66. Operating Temperature - 22°F to 122°F
Warranty	5 yr / 50,000 hour limited warranty
CRI	80+ (90 available upon request)
Certifications	ETL to UL Listed 1598

ORDERING GUIDE

Make selections by filling out the top row or highlighting options.



1500								
SERIES	LENGTH	OUTPUT	CCT	VOLTAGE	CONTROL	MOUNTING	FINISH	ACCESSORY
1500	14 14"nom 18 18"nom 24 24"nom	L35 35W L55 55W L70 70W L110 110W L140 140W L220 220W L240 240W	30 3000K 35 3500K 40 4000K 50 5000K	U 120-277V	ND NON-DIMMING D1 0-10V DIMMING	SW SWIVEL MOUNT YK YOKE MOUNT PS36 SINGLE PENDANT PD36 DOUBLE PENDANT	WH WHITE BL BLACK BZ BRONZE SO SILVER CU CUSTOM	G GLARE SHIELD M MARINE GRADE FINISH E EMERGENCY DRIVER Ax EXTENDED ARM (x=length) 2 NATATORIUM N NONE

*120" Max Pendant length

*x=36" max

Specifications sheets are subject to change without notification.

FIXTURE SIZES

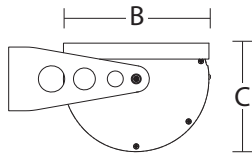

FIXTURE	A	B	C	WT.
14"	14 ³ / ₈ "	8 ¹ / ₄ "	6 ³ / ₄ "	10 lbs
18"	18 ³ / ₈ "	8 ¹ / ₄ "	6 ³ / ₄ "	12lbs
24"	24 ³ / ₈ "	8 ¹ / ₄ "	6 ³ / ₄ "	15 lbs




FINISHES (POWDER COATED)



MOUNTING INSTALLATION




SWIVEL MOUNT

A heavy duty adjustable swivel mount with mounting plate. 24" fixtures requires (2) swivel mounts.

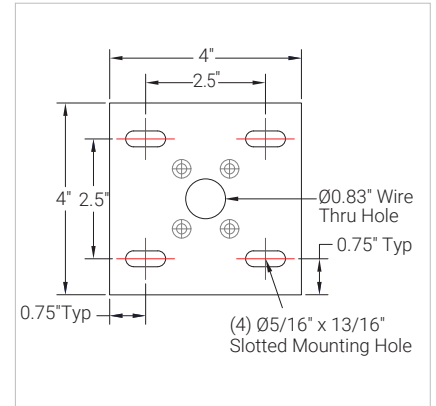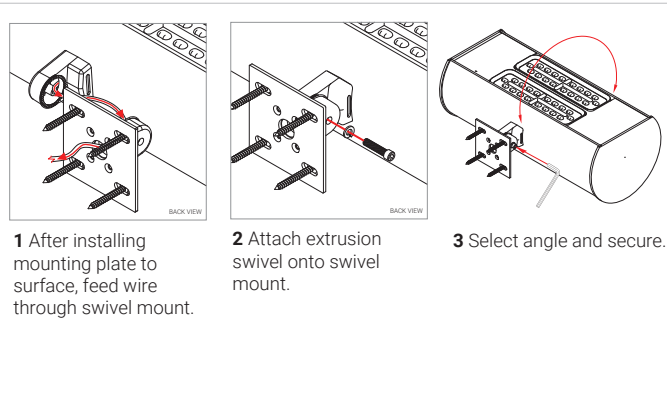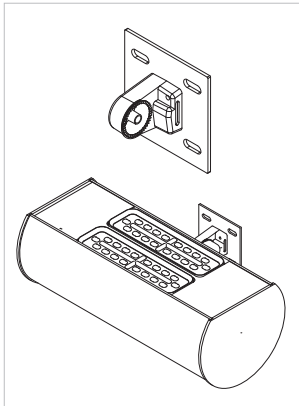

YOKE MOUNT


Implements rotary mechanics to enable directional adjustments simplicity. The symmetrical structure provides a clean and uniform structure. Mounts to structure cover via (2) 1/4" screws.

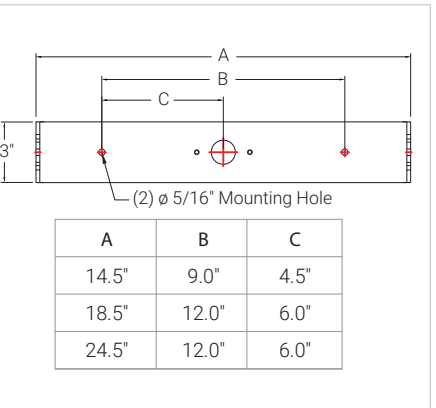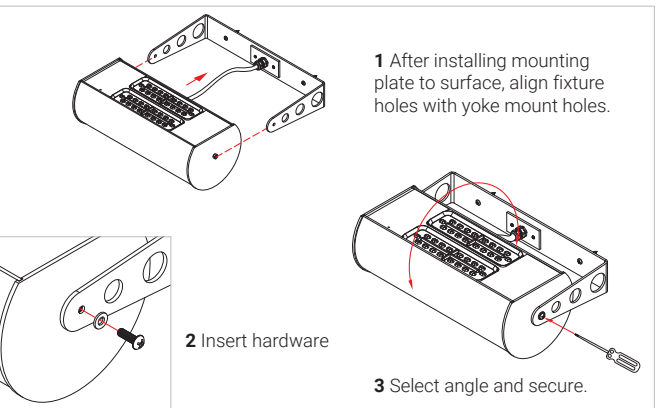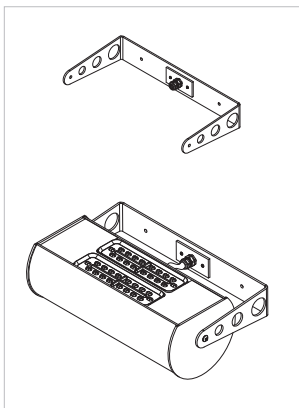

MOUNTING INSTALLATION


SINGLE FIXTURE, PENDANT MOUNT

With 36" standard stem.

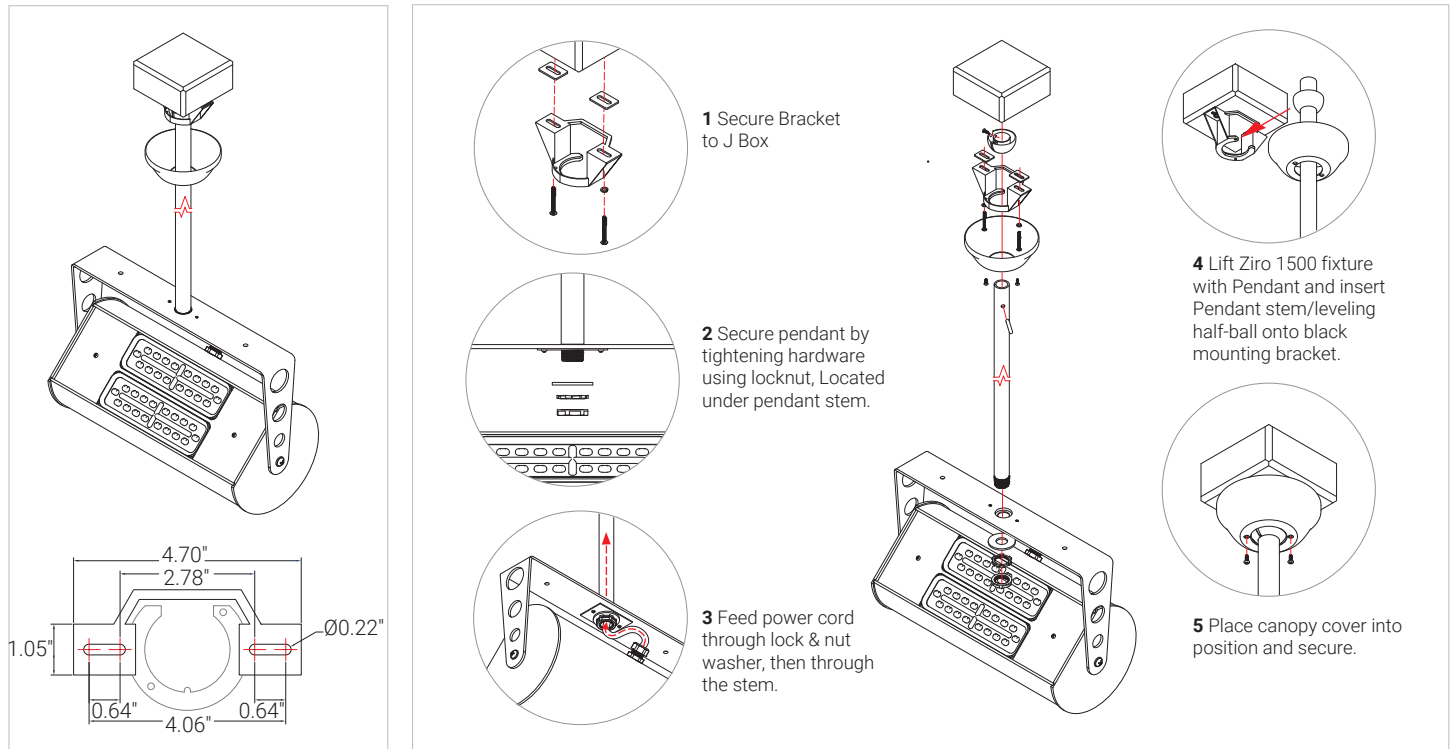

DOUBLE FIXTURE, PENDANT MOUNT

With 36" standard stems.



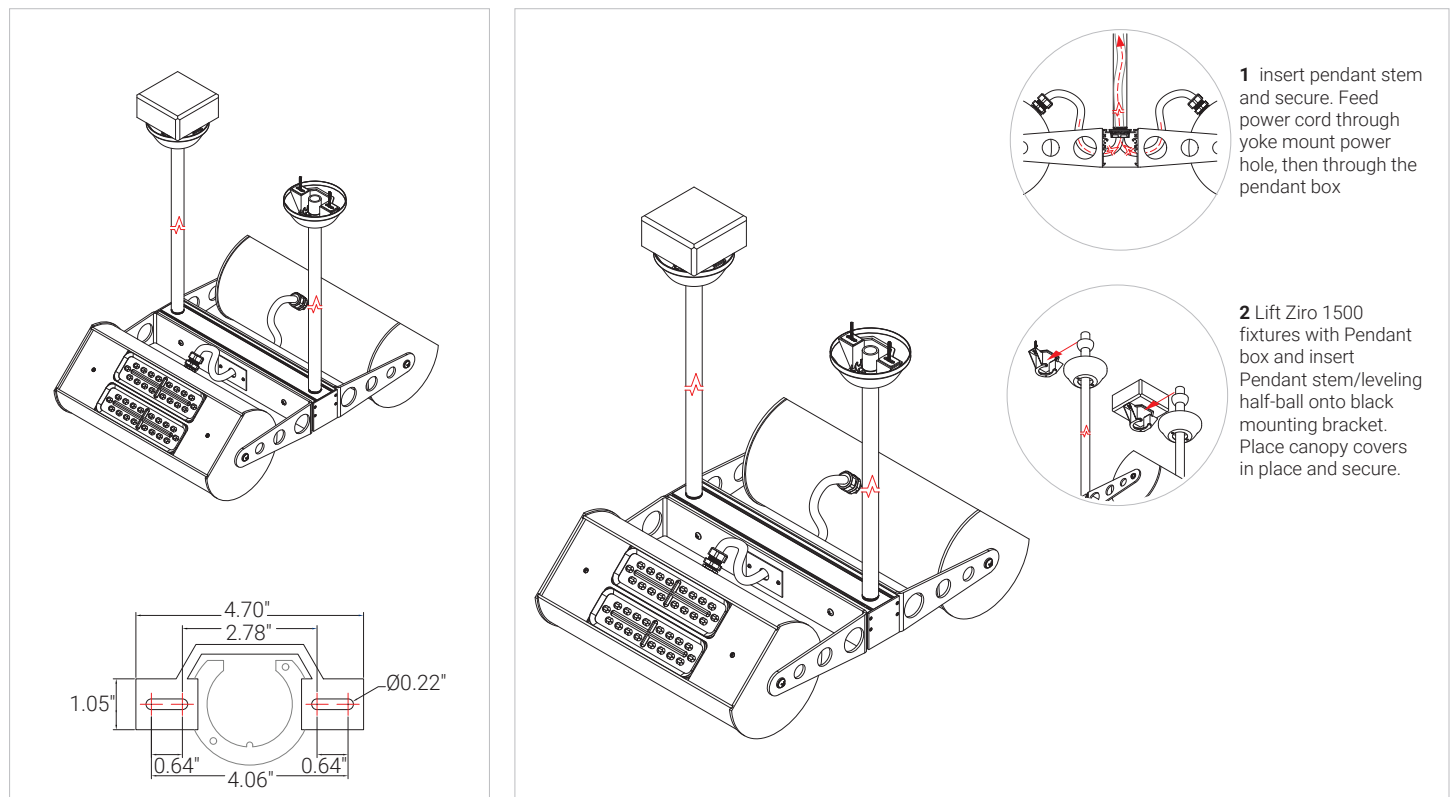


Specifications sheets are subject to change without notification.

ACCESSORIES




GLARE SHIELD

Minimizes a direct glare, while maintaining the LED output.

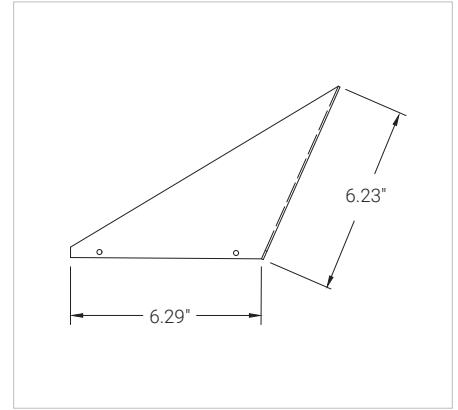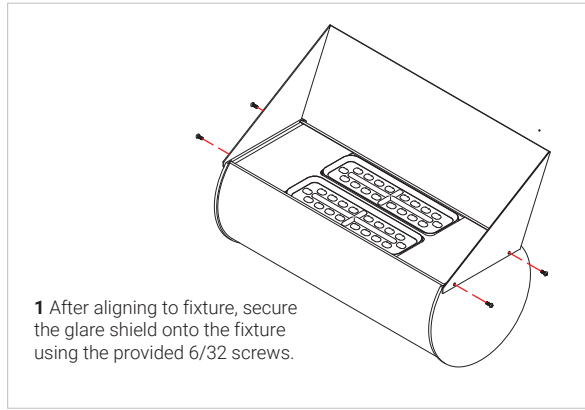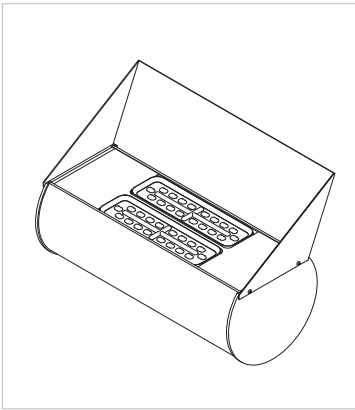


EXTENDED ARM

With swivel mount, extended arm is available in 4"-36" lengths. Power cords can be routed through arms, exiting close to the wall to connect to an adjacent j-box or other power outlet, providing a tidy installation. 24" fixtures requires (2) swivel mounts.

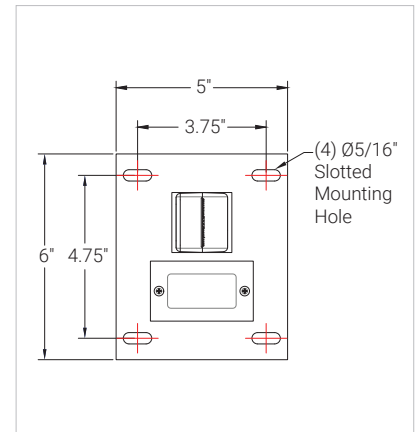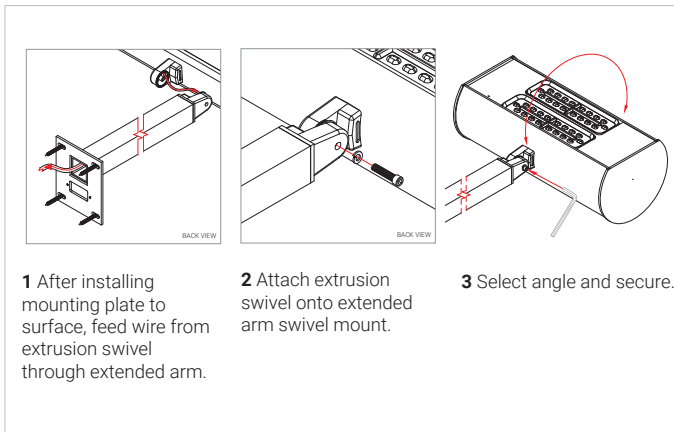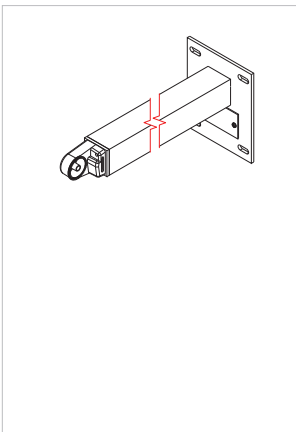

ELECTRICAL DETAILS

Non-Dimming | 3 Wire | 120-277V

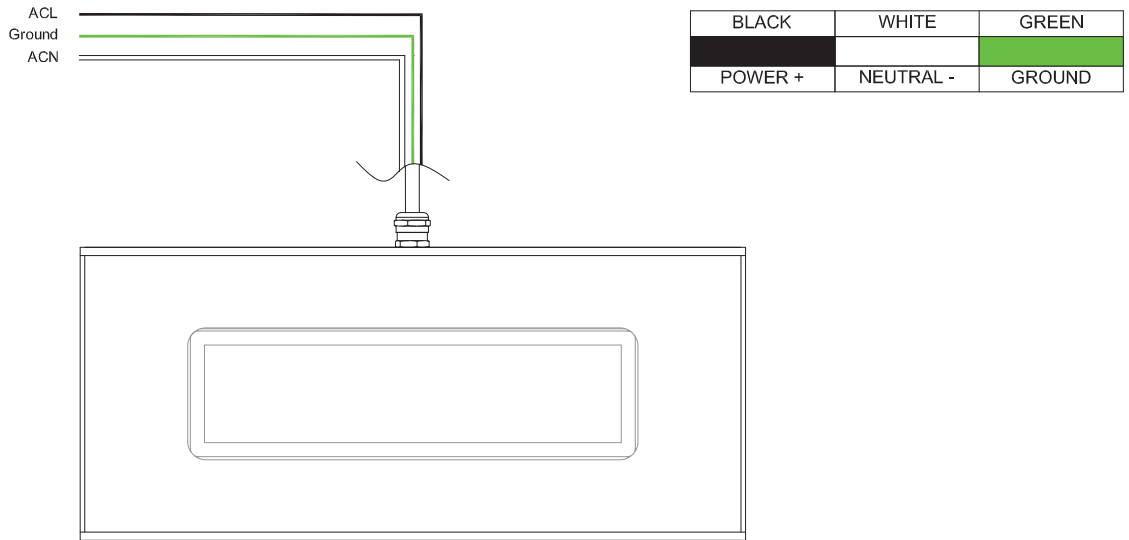

0-10V Dimming | 5 Wire | 120-277V

