


Streamline 7100

Indoor Linear LED

24V DC | 120-277VAC

ORGATECH

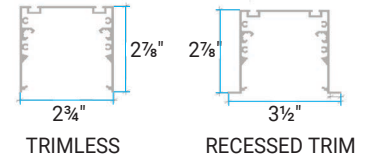

Project
Date



DESCRIPTION

The Streamline Series fixture is an interior linear 2 3/4" wide fixture designed to produce direct and indirect lighting in a stylish package. Designed to be pendant mounted, surface mounted or recessed. Available in 2', 3', 4', 6', and 8' lengths. Two smaller sizes 1", and 1 3/4" can be suspended with adjustable cordless Low Voltage cable suspension and remote 24V power supply to create a free floating appearance. Color temperature, wattage, voltage, driver, optics, mounting options and finish are all selectable to customize the fixture to your specific application.

FEATURES

Construction Powder Coated Aluminum Fixtures. Polycarbonate Lenses.

Length (nom.) 2ft, 3ft, 4ft, 8ft

White CCT 2700K, 3000K, 4000K, 5000K, 6500K

Dimming Non-dimming, 0-10V Dimming, Wire Dimming

Mounting Suspended Cable, Surface Mount, Recessed, Wall Mount

Finish Powder Coated Silver, Black, Bronze or White.

PERFORMANCE

Electrical 24V DC. 0-10V / 10% Dimming and Emergency Battery Pack; specify voltage.

LED Wattage LS 3W/ft (600lm/ft) / LH 4.6W/ft (920lm/ft) / LEH 5.8W/ft (1160lm/ft)

Max Run 33ft

Warranty 5 yr / 50,000 hour Limited Warranty

CRI 80+

Certifications UL Listed / BAA and BABA Options Available

LS 3W/ft	Delivered Output	Watts
2ft	1200lm	6w
3ft	1800lm	9w
4ft	2400lm	12w
8ft	4800lm	24w

LH 4.6W/ft	Delivered Output	Watts
2ft	1840lm	9.2w
3ft	2760lm	13.8w
4ft	3680lm	18.4w
8ft	7360lm	36.8w

LEH 5.8W/ft	Delivered Output	Watts
2ft	2320lm	11.6w
3ft	3480lm	17.4w
4ft	4640lm	23.2w
8ft	9280lm	46.4w

*based on 30° optics

ORDERING GUIDE Make selections by filling out the top row or highlighting options.


7100									
SERIES	LENGTH	OUTPUT	CCT	VOLTAGE	CONTROL	MOUNTING	FINISH	ACCESSORY	CERTIFICATIONS
7100	1 1'nom	LS STANDARD	27 2700K	24V 24V	ND NON DIMMING	Sx SUSPENDED CABLE	SO SILVER	E EMERGENCY	BAA BAA BABA BABA N NONE
	2 2'nom	LH HIGH	30 3000K		D1 0-10V DIMMING	SM SURFACE MOUNT	BL BLACK	L Blade LOUVER	
	3 3'nom	LEH EXTRA HIGH	40 4000K		D2 WIRE DIMMING	R RECESSED	BZ BRONZE	M MARINE GRADE FINISH	
	4 4'nom		50 5000K			WM WALL MOUNT	WH WHITE	N NONE	
	8 8'nom		65 6500K			C CUSTOM	CU CUSTOM		

Specifications sheets are subject to change without notification.

MOUNTING OPTIONS


SUSPENDED CABLE

Provides a pendant mount with a low voltage aircraft cable available at your requested length.

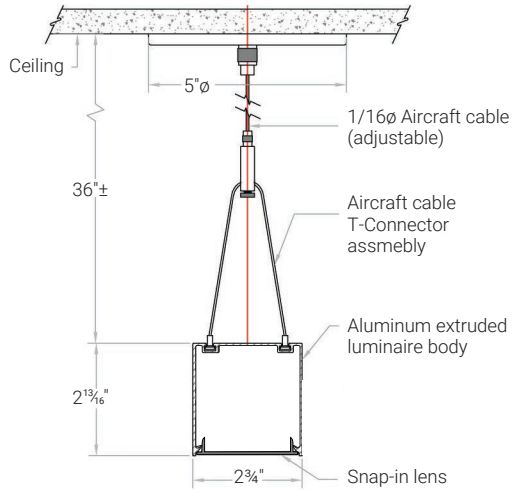


RECESSED

Offers a trim for a simple and clean installation.

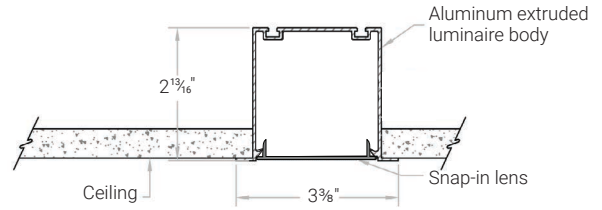

SURFACE MOUNT

Screws directly onto a surface via the bottom end of the fixture.

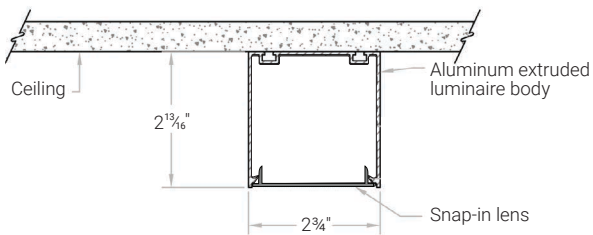

WALL MOUNT

Screws onto a wall using a side bracket.

