

Omegalux 1200

Linear Wallwash LED

120-277VAC

ORGATECH



Project

Date

LS 3.5W/ft	Delivered Output	Watts
1ft	273lm	3.5w
2ft	546lm	7w
3ft	819lm	10.5w
4ft	1092lm	14w
5ft	1365lm	17.5w
6ft	1638lm	21w
7ft	1911lm	24.5w
8ft	2184lm	28w

LH 4.5W/ft	Delivered Output	Watts
1ft	351lm	4.5w
2ft	702lm	9w
3ft	1053lm	13.5w
4ft	1404lm	18w
5ft	1755lm	22.5w
6ft	2106lm	27w
7ft	2457lm	31.5w
8ft	2808lm	36w

LEH 6.7W/ft	Delivered Output	Watts
1ft	523lm	6.7w
2ft	1046lm	13.4w
3ft	1559lm	20.1w
4ft	2029lm	26.8w
5ft	2615lm	33.5w
6ft	3138lm	40.2w
7ft	3661lm	46.9w
8ft	4184lm	53.6w

LXH 13.4W/ft	Delivered Output	Watts
1ft	1046lm	13.4w
2ft	2092lm	26.8w
3ft	3138lm	40.2w
4ft	4184lm	53.6w
5ft	5230lm	67w
6ft	6276lm	80.4w
7ft	7322lm	93.8w
8ft	8368lm	107.2w

*based on 30° optics

ORDERING GUIDE Make selections by filling out the top row or highlighting options.

1200										
SERIES	LENGTH	OUTPUT	CCT	VOLTAGE	CONTROL	OPTICS	MOUNTING	FINISH	ACCESSORY	CERTIFICATIONS
1200	1 1'nom 2 2'nom 3 3'nom 4 4'nom 5 5'nom 6 6'nom 7 7'nom 8 8'nom Rx ROWx (x=length)	LS STANDARD LH HIGH LEH EXTRA HIGH LXH EXTREMELY HIGH	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	U 120-277V	ND NON DIMMING D1 0-10V DIMMING TRI FORWARD PHASE ELV REVERSE PHASE	15 15° 30 30° 45 45° 120 120°	SW SWIVEL MOUNT LB L BRACKET	WH WHITE BL BLACK BZ BRONZE SO SILVER CU CUSTOM	B BLADE LOUVER G GLARE SHIELD Ax EXTENDED ARM (x=length) P PERMAPOST M MARINE GRADE FINISH 2 NATATORIUM WAF* WILDLIFE AMBER FILTER N NONE	BAA BAA BABA BABA N NONE

SPECIFICATIONS SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION.

*RECOMMENDED FOR USE WITH 4000K, 3500K, 3000K, 2700K ONLY


Orgatech® | 12203 Magnolia Ave Suite 1, Riverside, CA 92503 | 626.969.6820 | orgatech.com | 08/2025 V23




PHOTOMETRICS AND OPTICS

Aiming fixtures with the lens options shown enable perfect asymmetric performances to meet the needs of any wallwashing project. Combining easy specification with easy aiming for long throw with even, shadowless distribution.


PHOTOMETRIC DATA - LS 3.5W/ft (based off 4ft fixture)

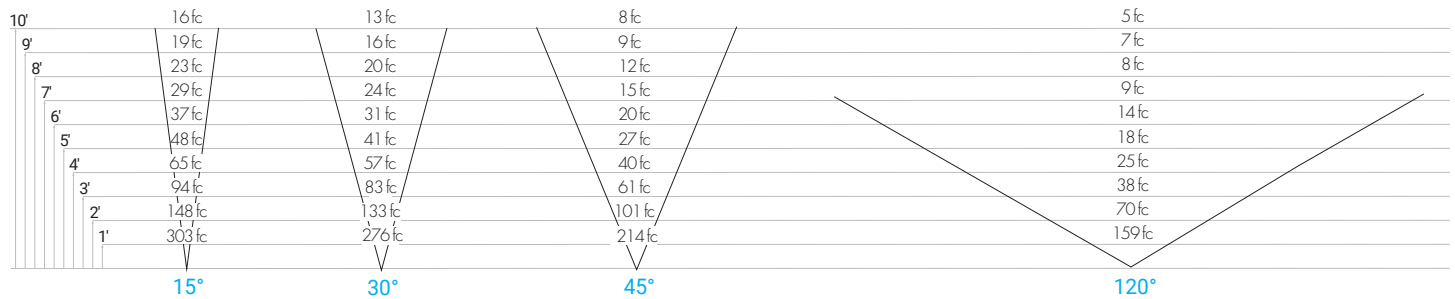


PHOTOMETRIC DATA - LH 4.5W/ft (based off 4ft fixture)

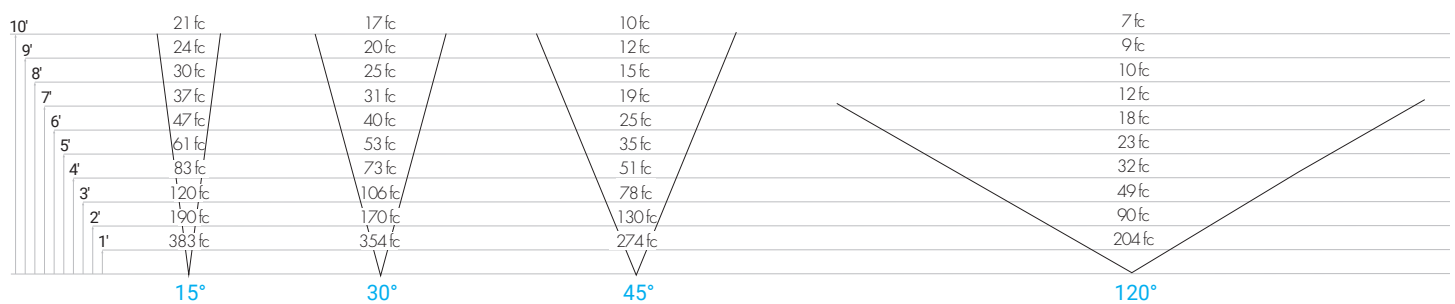

PHOTOMETRIC DATA - LEH 6.7W/ft (based off 4ft fixture)

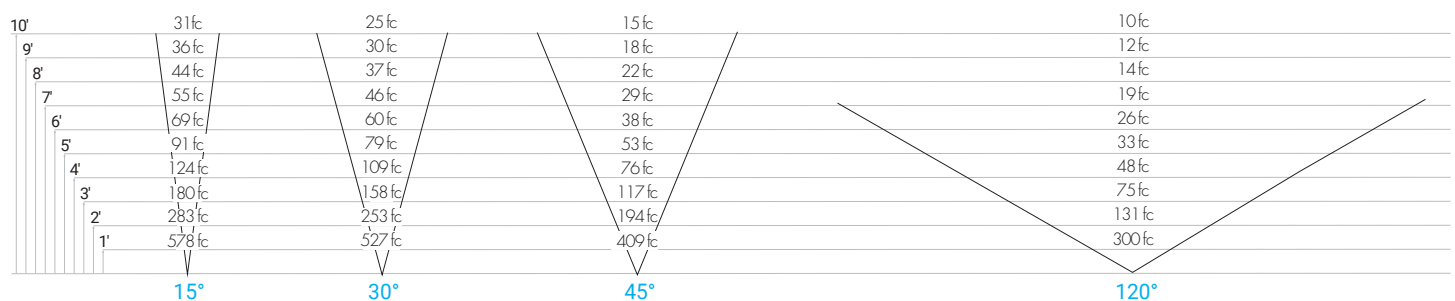

PHOTOMETRIC DATA - LXH 13.4W/ft (based off 4ft fixture)









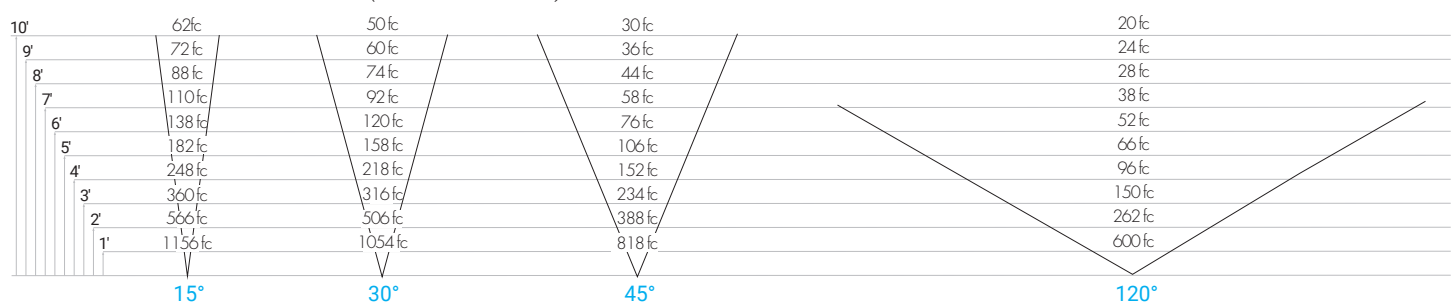


OPTICS



Specifications sheets are subject to change without notification.

FIXTURE SIZES

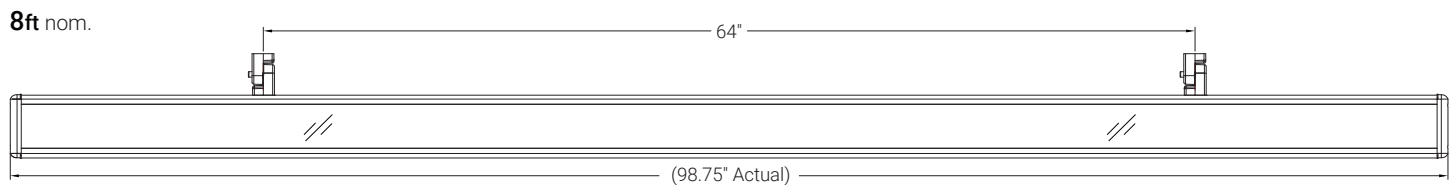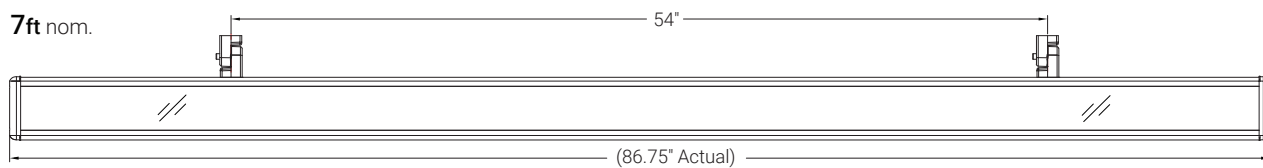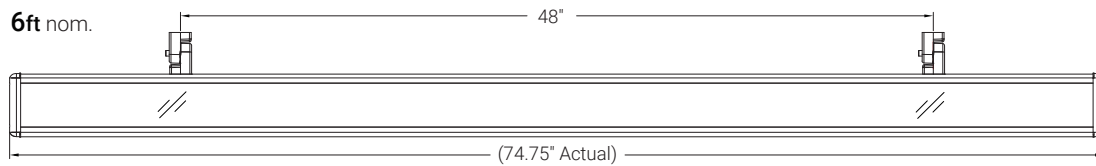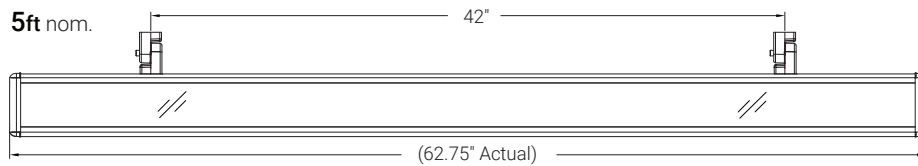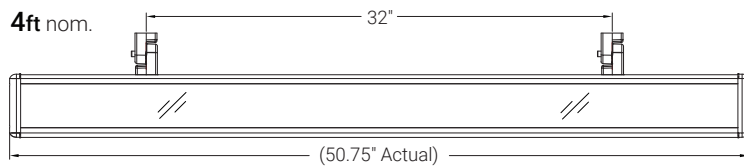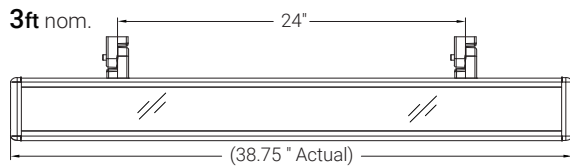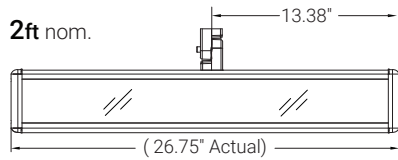

FINISHES (POWDER COATED)



WHITE



BLACK



BRONZE



SILVER




CUSTOM

MOUNTING INSTALLATION

SW Swivel Mount


A heavy duty adjustable swivel mount with mounting plate. Wires are routed through the swivel mount, exiting close to the wall to connect to an adjacent j-box or other power outlet, providing a tidy installation. 1/2" nipple (can be specified) mounts directly to weatherproof canopies.

*(2) Swivel Mounts needed per fixture for 3G rating to apply.

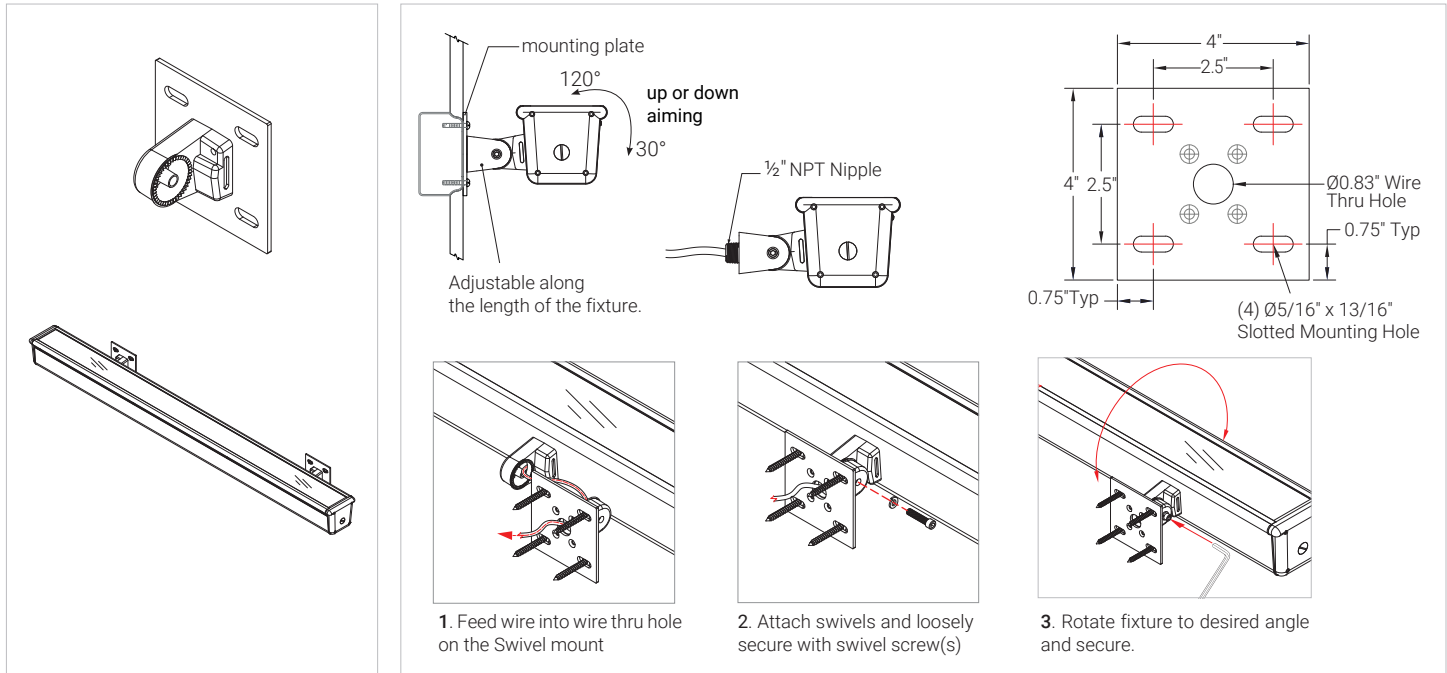

Ax Extended Arm

With swivel mount, extended arm is available in 4"-36" lengths. Power cords are routed through arms, exiting close to the wall to connect to an adjacent j-box or other power outlet, providing a tidy installation.

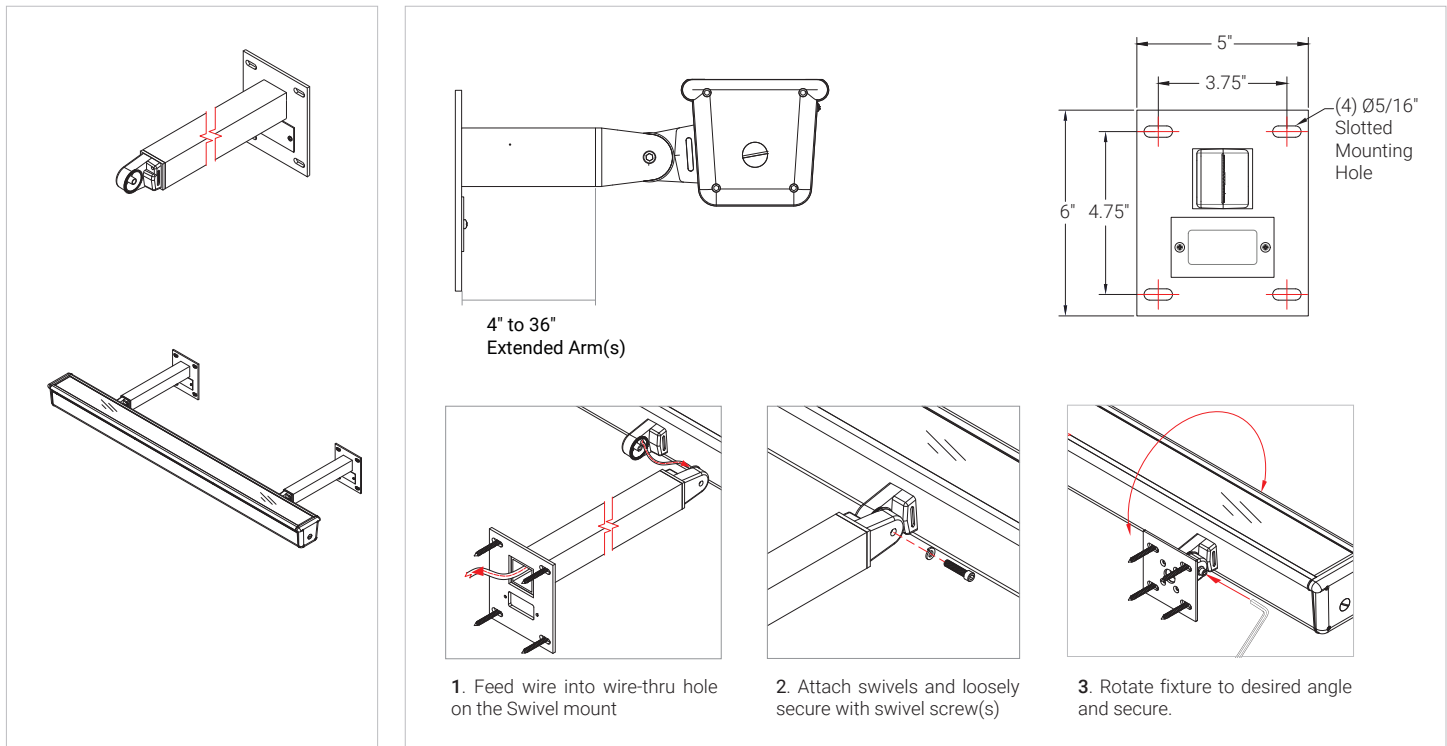


Specifications sheets are subject to change without notification.

MOUNTING INSTALLATION


LB L Bracket

Allows for a surface mounting with a swivel tilt. Weatherproof cord exits 3" from the back right end of individual fixtures with the lens in the up position.

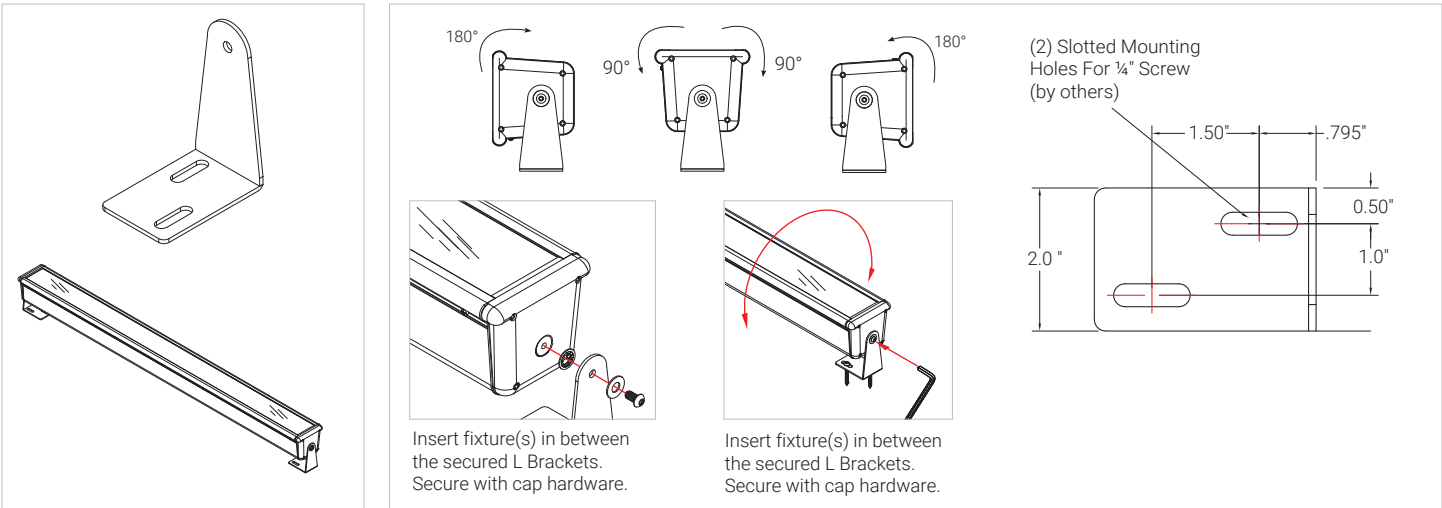


ROW MOUNTING

Power Input - Row Fixtures Facing Up
Standard Wiring Configuration

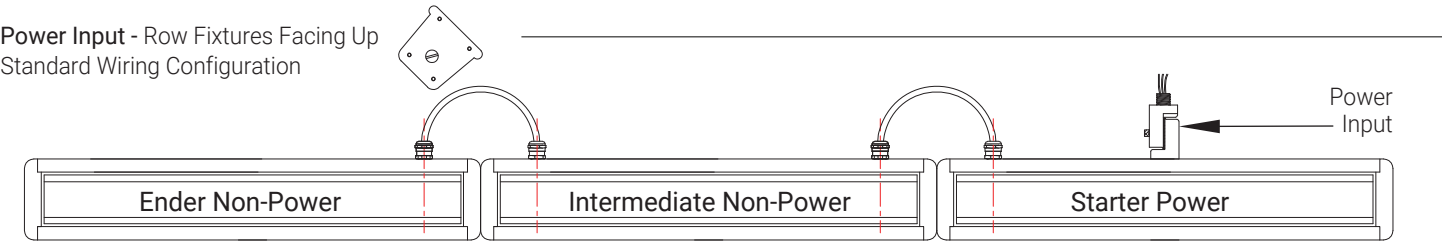


Power Input - Row Fixtures Facing Down

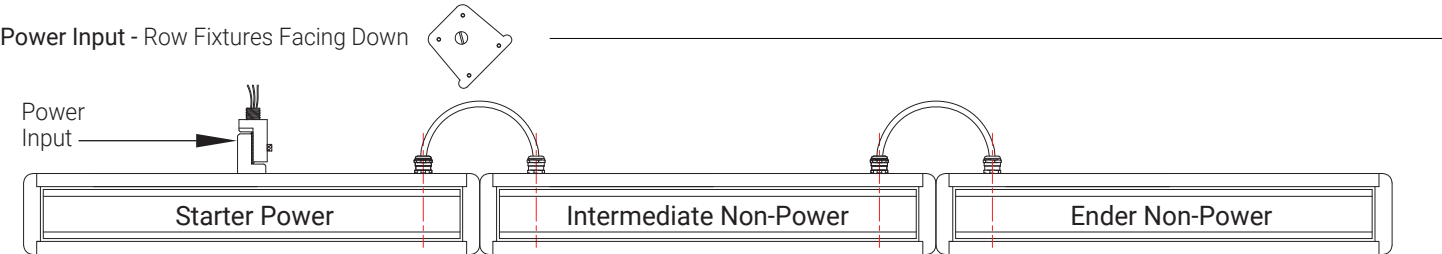


Rows are calculated with standard fixture dimensions and will leave no gap between each fixture. For exact lengths, request a custom run and specify the exact run length.

STARTER CABLE



JUMPER CABLE



PART #	DESCRIPTION
M12-SC-4FT	48" Starter Cable


PART #	DESCRIPTION
M12-JC-1FT	12" Jumper Cable
M12-JC-2FT	24" Jumper Cable
M12-JC-3FT	36" Jumper Cable
M12-JC-4FT	48" Jumper Cable

*longer cable lengths available per request.

ACCESSORIES


P Permapost

Provides easy at-grade installation. Includes swivel mount with 1/2" nipple. Fixture must be mounted at least 4" above ground level to avoid water accumulation.

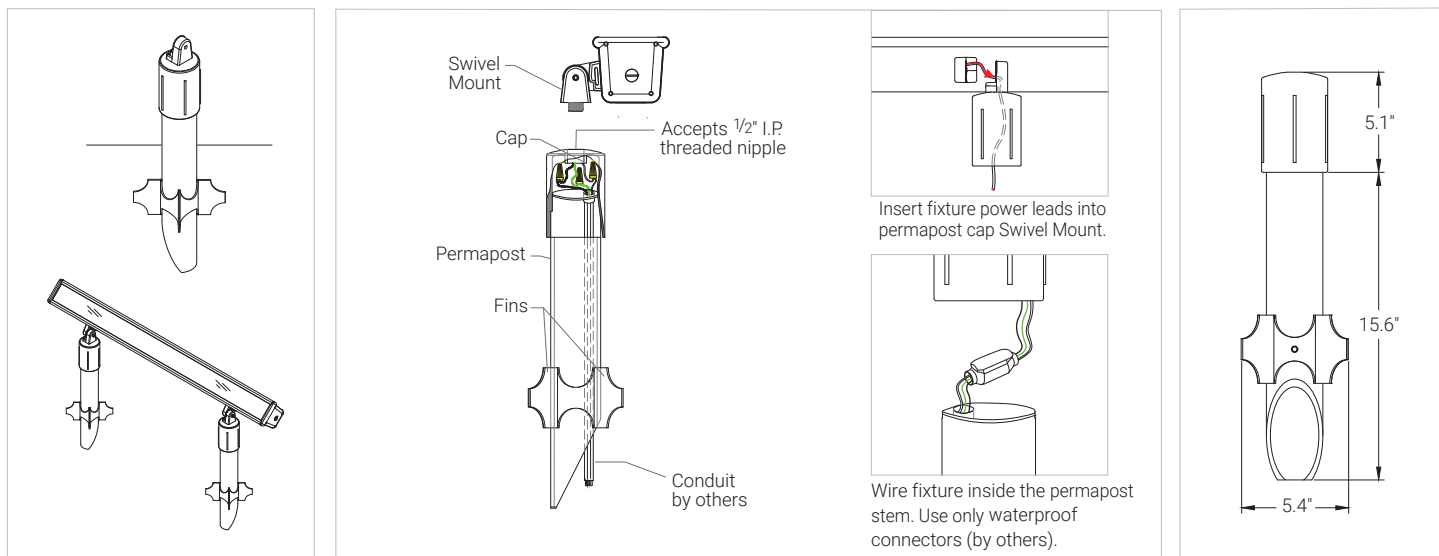


G Glare Shield

Minimizes a direct glare, while maintaining the LED output. Factory installed.

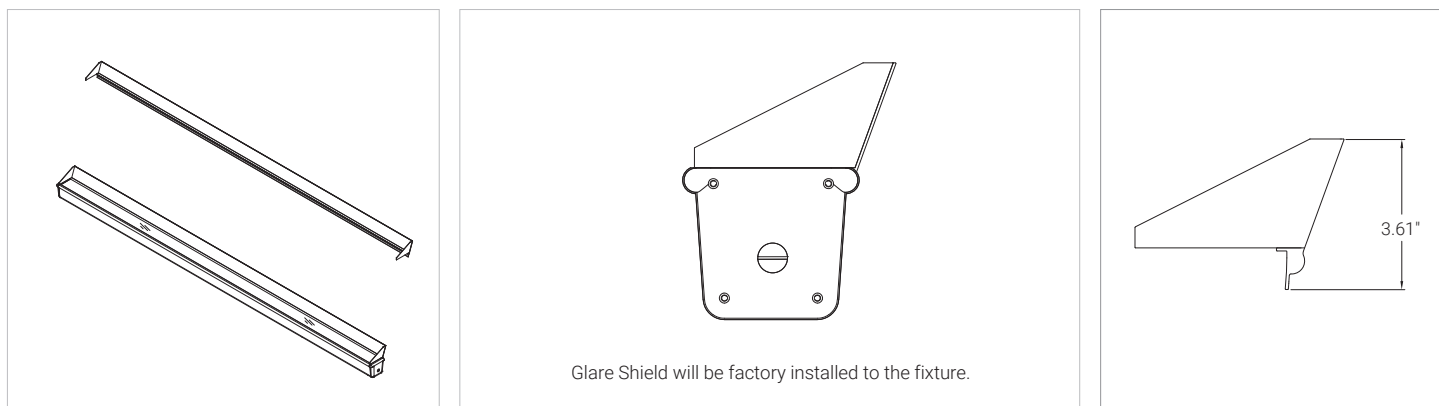

B Blade Louver

Minimizes a horizontal glare, while maintaining the LED output.

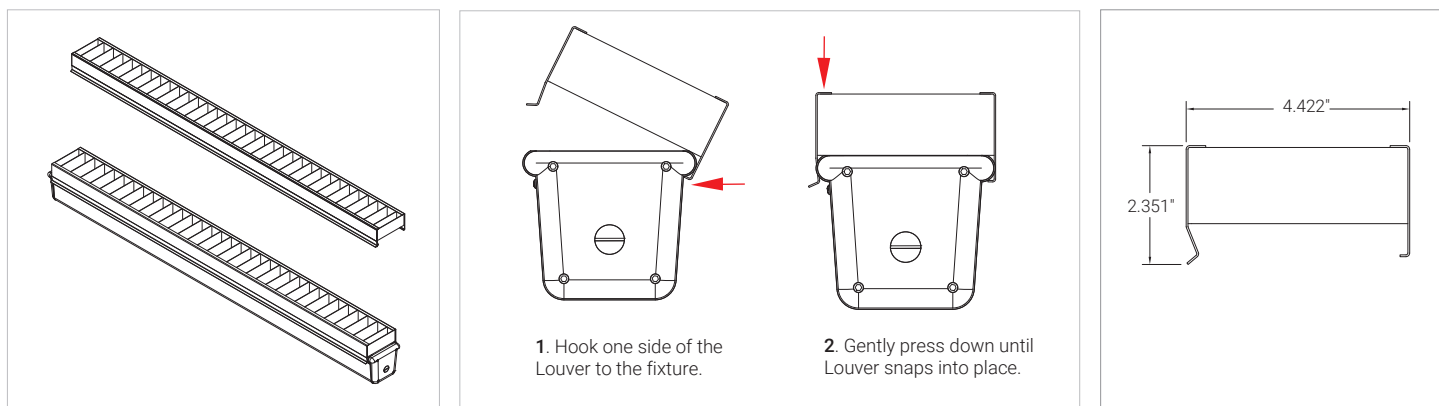

ELECTRICAL DETAILS

Non-Dimming | 3 Wire




0-10V Dimming | 5 Wire



TRIAC | Forward Phase | 3 Wire

Based on Lutron DIVA C•L DVCL-253P 250W

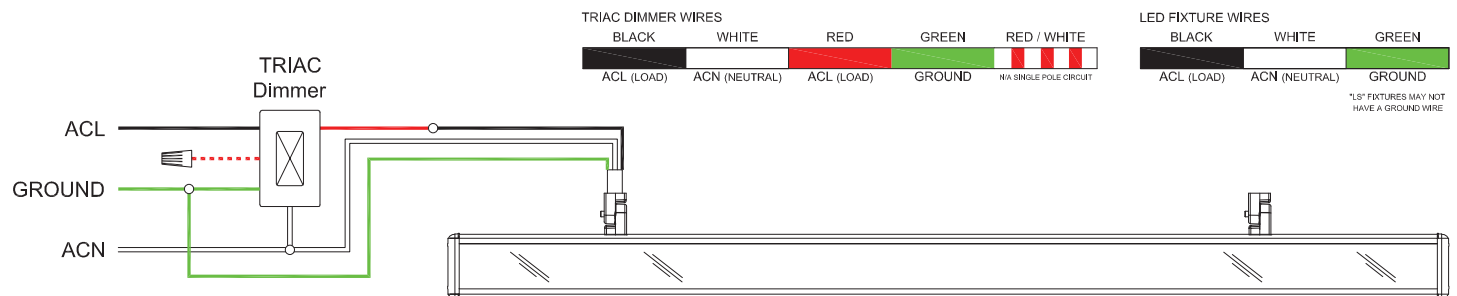

ELV | Reverse Phase | 3 Wire

Based on Lutron DIVA DVRP-253P 250W & Lutron DIVA DVELV-303P-WH 300W

