


Gulfstream 2[®] Inground Wallwash


27K | 30K | 40K | 50K | 65K
120-277V AC
IP68/IK10

ORGATECH[®]

High Performance Luminaire
Superior Glare Control
Easy Installation
IP68 Protection
High level of ingress protection for outdoor applications.

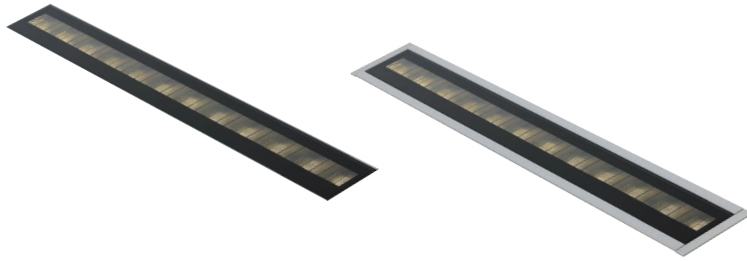

Outdoor buriable IP68, very high output luminaire with glare control and secondary lenses for asymmetric throw. Gulfstream 2[®] is available with trim or as a trimless model with a seamless tempered glass edge, exposing only a thin border of the inground mounting housing. Stand alone or continuous housings with covers between fixtures which simplify installation by providing a thru-wiring option. Options include internal louvers for glare control and non-slip lens treatments. Gulfstream 2[®] is also available with white LEDs and the option of line voltage options.

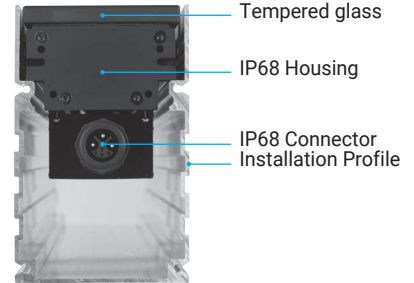


Technical Specifications

| Length (nom) | 1ft | 2ft | 3ft | 4ft |
|--------------------------------|--|--------------------------------|--------------------------------|--------------------------------|
| Voltage | 120-277V AC | | | |
| Wattage | LS 13.5W LH 19W | 20.5W 32.5W | 28W 48W | 35.5W 65W |
| Lumens | LS 600lm LH 1205lm | 1200m 2410lm | 1800lm 3615lm | 2400lm 4820lm |
| Dimensions (LxWxH) | T1 12.7"x3"x3.2" T2 12.7"x3"x4.7" | 24.5"x3"x3.2" 24.5"x3"x4.7" | 36.3"x3"x3.2" 36.3"x3"x4.7" | 48.1"x3"x3.2" 48.1"x3"x4.7" |
| Luminaire weight | 3.48 lbs. | 5.20 lbs. | 7.41 lbs. | 10.05 lbs. |
| Inground profile weight | 1.67 lbs. | 3.35 lbs. | 5.03 lbs. | 6.61 lbs. |
| CCT | 2700K / 3000K / 4000K / 5000K / 6500K | | | |
| Color rendering index | 80+ (white) | | | |
| LED lifetime | LM80 ≤ 100,000h | | | |
| Thru-Wiring (Max) | 120V - 145ft / 240V - 290ft | | | |
| Control | DMX with RDM / DMX/ DALI / 0-10(1-10V) / PWM DIMMING | | | |
| Housing | Extruded aluminum / Tempered glass cover | | | |
| Finish | Anodized dark gray / Liquid painted for black | | | |
| Ingress | IP68 / IK10 | | | |


| | |
|------------------------------|--|
| Secondary Optic | Wide Optic Asymmetric Optic |
| Beam Angle | 10° 20° 40° 10° x 60° 20° x 40° |
| Luminaire efficacy | Up to 86lm/W |
| Operating Temperature | min -20°C, max 50°C |
| Storage Temperature | min -30°C, max 80°C |
| Trim | Trimless Trim Trim-Left Trim-Center Trim-Right |

Trimless

Trim

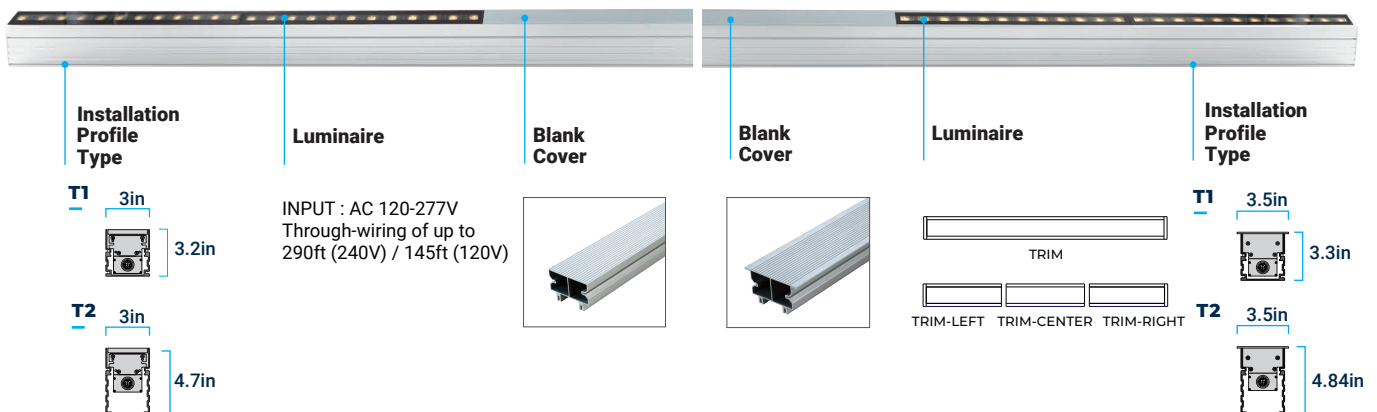


Lengths: 12.68in / 24.49in / 36.30in / 48.11in




Installation Profile Type

T1




T2



OPTIONS


Micro Louver Option


Micro louvers are a built-in option and tilted to block out glare above 40 degrees from the verticle plane.

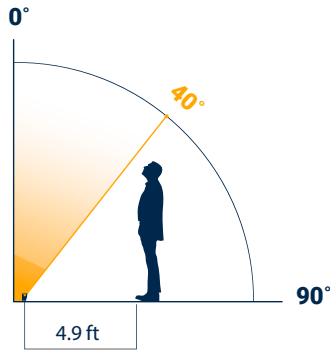

Non-Slip Treatment Option

Makes fixture slip-resistant.


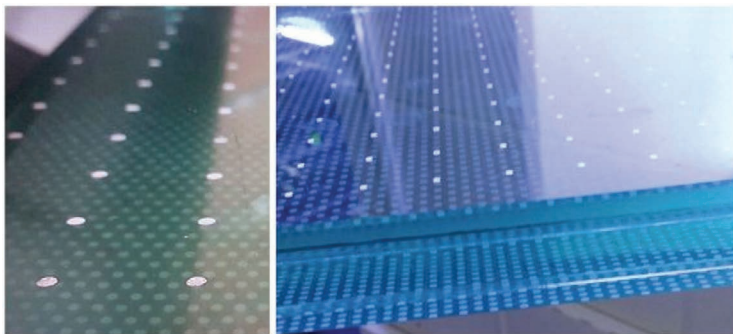


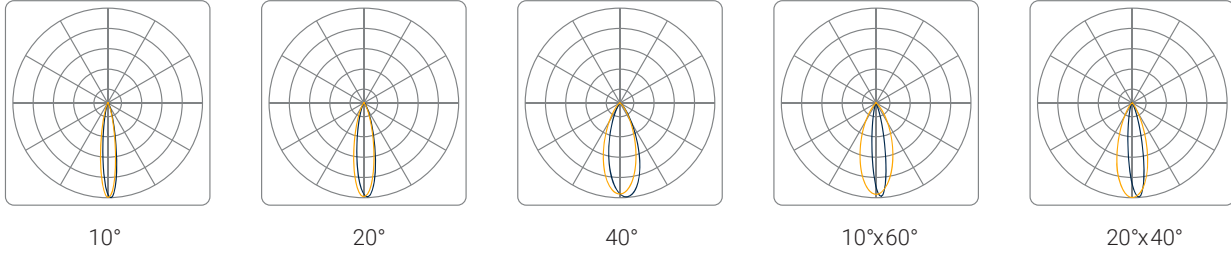

SECONDARY OPTICS


Wide Optic

Wide optic evens illumination at close range.

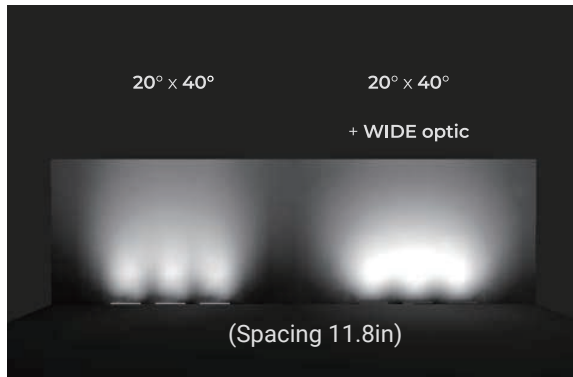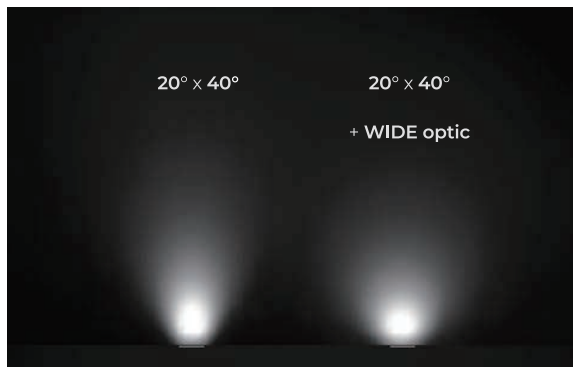


Asymmetric Optic


Asymmetric optic enables a 20 degree angle from the flat position.

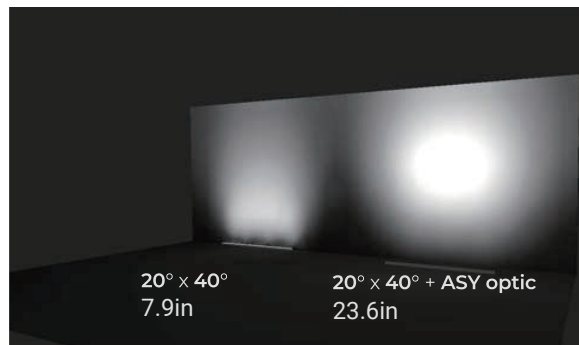

Starter Cable



Jumper Cable




End Cap



Trimless Blank Cover



Trim Blank Cover




IP67 QUICK CONNECT STARTER & JUMPER CABLES

(Custom lengths available)

| PART # | DESCRIPTION |
|-----------|--------------------------|
| GSSC5P-5 | GS1-2 Starter Cable 5ft |
| GSSC5P-10 | GS1-2 Starter Cable 10ft |
| GSSC5P-15 | GS1-2 Starter Cable 15ft |
| GSSC5P-20 | GS1-2 Starter Cable 20ft |
| GSJ5P-5 | GS1-2 Jumper Cable 5ft |
| GSJ5P-10 | GS1-2 Jumper Cable 10ft |
| GSJ5P-15 | GS1-2 Jumper Cable 15ft |
| GSJ5P-20 | GS1-2 Jumper Cable 20ft |
| GS2EC | GS2 End Cap |

BLANK COVER

| PART # | DESCRIPTION |
|-----------|----------------------------|
| GS2TLBC-3 | Trimless Blank Cover / 3FT |
| GS2TLBC-6 | Trimless Blank Cover / 6FT |
| GS2TLBC-9 | Trimless Blank Cover / 9FT |
| GS2TMBC-3 | Trim Blank Cover / 3FT |
| GS2TMBC-6 | Trim Blank Cover / 6FT |
| GS2TMBC-9 | Trim Blank Cover / 9FT |




HOUSING TYPE 1

| PART # | DESCRIPTION |
|---------|-----------------------|
| GS2T1-1 | Housing Type T1 / 1FT |
| GS2T1-2 | Housing Type T1 / 2FT |
| GS2T1-3 | Housing Type T1 / 3FT |
| GS2T1-4 | Housing Type T1 / 4FT |
| GS2T1-6 | Housing Type T1 / 6FT |
| GS2T1-9 | Housing Type T1 / 9FT |

HOUSING TYPE 2

| PART # | DESCRIPTION |
|---------|-----------------------|
| GS2T2-1 | Housing Type T2 / 1FT |
| GS2T2-2 | Housing Type T2 / 2FT |
| GS2T2-3 | Housing Type T2 / 3FT |
| GS2T2-4 | Housing Type T2 / 4FT |
| GS2T2-6 | Housing Type T2 / 6FT |
| GS2T2-9 | Housing Type T2 / 9FT |



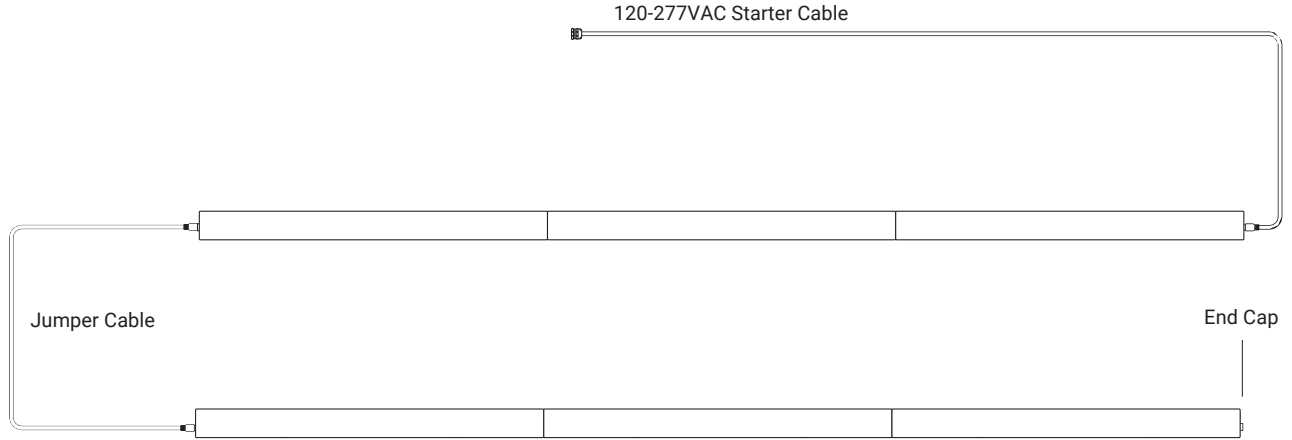

ORDERING GUIDE

Make selections by filling out the top row or highlighting options.

GULFSTREAM 2 - WHITE

| GS2 | | | | | | | | | | |
|--------------------|----------|---------------------|------------------------|---------------------------------|---------------|--|----------------------------------|---|---|---|
| SERIES | TYPE | LENGTH (nom. ft) | OUTPUT | CCT | VOLTAGE | CONTROL | BEAM ANGLE | SECONDARY OPTIC | TRIM | OPTIONS |
| GS2 GULFSTREAM2 | T1 T2 | 1 2 3 4 | LS STANDARD LH HIGH | 27K 30K 40K 50K 65K | U 120-277V AC | DMX / RDM DMX DALI (0-10V) PWM | 10 20 40 10x60 20x40 | ASY ASYMMETRIC LENS WID WIDE LENS N NONE | TL TRIMLESS TM TRIM Row only ----- TML TRIM-LEFT TMC TRIM-CENTER TMR TRIM-LEFT | NS NON-SLIP TREATMENT MLV MICRO LOUVER N NONE |

