

Gulfstream 4[®] RGB

Gulfstream 4[®]/EX RGB

Spotlight LED

120-277V AC | IP67



ORGATECH[®]

Compact Design

Rotate + Tilt System

IP67 Protection

DMX / RDM

Various Optics & Glare Control


Flexible Installation



The Gulfstream 4[®] RGB is a DMX 512 controlled LED spot and flood fixture. The fixture is designed with a slim 1.97" wide profile discreetly integrating the fixture into any architectural design while providing precise and powerful color changing illumination. The Gulfstream 4 uses an array of optics to improve performance and the lumens for grazing and wallwash applications.

Technical Specifications

Product	GS4-9*	GS4-18	GS4-27
	GS4EX-36	GS4EX-54	GS4EX-72
Voltage	120V- 277V AC		
Wattage	30W	56W	82W
RGB/EX	103W	151W	198W
Efficacy	Up to 43 lm/W		
Lumens**	940lm	1880lm	2820lm
RGB/EX	3760lm	5340lm	7120lm
Dimensions (LxWxH)	4.96"x2.44"x8.27"	8.35"x2.44"x8.27"	11.73"x2.44"x8.27"
RGB/EX	8.35"x2.44"x11.8"	11.73"x2.44"x11.8"	17.8"x2.44"x11.8"
Weight	2.65 lbs(1.2Kg)	4.63 lbs(2.10Kg)	5.95 lbs(2.7Kg)
RGB/EX	9.26 lbs(4.2Kg)	11.9 lbs(5.4Kg)	17.2 lbs(7.8Kg)
*9 LED remote PWM driver only **RGB based on 10° optics. RGB/EX based on 14° optics			
Operating Temp	min -20°C (-5°F) / max 50°C (122°F)		
Storage Temp	min -30°C (-22°F) / max 80°C (176°F)		
Optics	6° / 10° / 20° / 40° / 20°x 40°		
RGB/EX	8° / 14° / 20° / 40° / 20°x 40°		
CCT	RGB		
Color rendering index	80+		
Control	DMX with RDM, PWM*		
LED lifetime	LM90 ≤ 51,400h		
Housing	Extruded & die-casted aluminum / Tempered glass lens		
Finish	Dark gray		
Ingress	IP67		

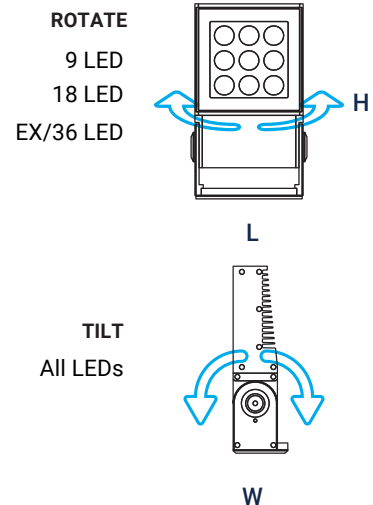

GULFSTREAM 4 - RGB

ORDERING GUIDE Make selections by filling out the top row or highlighting options.

GS4							
SERIES	LED QTY	CCT	VOLTAGE	CONTROLS	OPTICS	MOUNTING	ACCESSORY
GS4 GULFSTREAM 4	9 18 27	RGB	U 120-277V	DMX/RDM PWM* PWM ND NON DIMMING	6 10 20 40 20x40	AB ANCHOR BASE GS GROUND SPIKE PP PERMAPOST PM POLE MOUNT CU CUSTOM	SFT SOFTENER MLV MICRO LOUVER WDH WIDE OPTIC - HORIZONTAL WDV WIDE OPTIC - VERTICAL N NONE

*PWM - Wireless Casambi Control **PWM available for 9 LED remote driver only

Gulfstream 4® RGB | Gulfstream 4®/EX RGB

ORGATECH®

GULFSTREAM 4/EX - RGB


ORDERING GUIDE Make selections by filling out the top row or highlighting options.

GS4EX							
SERIES	LED QTY	CCT	VOLTAGE	CONTROLS	OPTICS	MOUNTING	ACCESSORY
GS4EX GULFSTREAM 4 EX	36 54 72	RGB	U 120-277V	DMX/RDM ND NON DIMMING	8 14 20 40 20x40	AB ANCHOR BASE GS GROUND SPIKE PP PERMAPOST PM POLE MOUNT CU CUSTOM	SFT SOFTENER MLV MICRO LOUVER WDH WIDE OPTIC - HORIZONTAL WDV WIDE OPTIC - VERTICAL N NONE

DIMENSIONS


Gulfstream 4 RGB

9 LED*




Length 4.96in (126mm)

18 LED




Length 8.35in (212mm)

27 LED



Length 11.73in (298mm)

1.97in (50.03mm)




Height
8.27in (210.1mm)

Width 2.44in (62mm)


Gulfstream 4/EX RGB

36 LED




Length 8.3in (212mm)

54 LED




Length 11.7in (298mm)

72 LED



Length 17.8in (451mm)

2in (50mm)




Height
11.8in (300mm)

Width 2.4in (62mm)


LUMINAIRE ACCESSORIES

RGB




Optics	9 LED	18 LED	27 LED
6°	790lm	1580lm	2370lm
10°	940lm	1880lm	2820lm
20°	900lm	1810lm	2720lm
40°	850lm	1700lm	2550lm
20°x40°	680lm	1370lm	2050lm

RGB + SOFTENER




Optics	9 LED	18 LED	27 LED
10°	840lm	1690lm	2530lm
20°	810lm	1620lm	2440lm
40°	760lm	1530lm	2290lm
20°x40°	610lm	1230lm	1840lm

RGB + WIDE OPTIC



Optics	9 LED	18 LED	27 LED
10°	700lm	1410lm	2110lm
20°	670lm	1350lm	2040lm
40°	630lm	1270lm	1910lm
20°x40°	510lm	1020lm	1530lm

RGB + MICRO LOUVER



Optics	9 LED	18 LED	27 LED
10°	470lm	940lm	1410lm
20°	450lm	900lm	1360lm
40°	420lm	850lm	1270lm
20°x40°	340lm	680lm	1020lm

LUMINAIRE ACCESSORIES

RGB/EX



Optics	36 LED	54 LED	72 LED
8°	3170lm	5460lm	7280lm
14°	3760lm	5340lm	7120lm
20°	3630lm	5150lm	6870lm
40°	3400lm	4820lm	6430lm
20°x40°	2740lm	3890lm	5190lm

RGB/EX + SOFTENER



Optics	36 LED	54 LED	72 LED
14°	3380lm	4800lm	6400lm
20°	3260lm	4630lm	6180lm
40°	3060lm	4330lm	5780lm
20°x40°	2460lm	3500lm	4670lm

RGB/EX + WIDE OPTIC



Optics	36 LED	54 LED	72 LED
14°	2820lm	4000lm	5340lm
20°	2720lm	3860lm	5150lm
40°	2550lm	3610lm	4820lm
20°x40°	2050lm	2910lm	3890lm

RGB/EX + MICRO LOUVER



Optics	36 LED	54 LED	72 LED
14°	1880lm	2670lm	3560lm
20°	1810lm	2570lm	3430lm
40°	1700lm	2410lm	3210lm
20°x40°	1370lm	1940lm	2590lm

MOUNTINGS



ANCHOR BASE

For surface and retrofit mounting


MATERIAL	Anodized Aluminum
DIMENSION (LxWxH)	7.9x2.4x0.3in(200x62x8.65mm) / 11.3x2.4x0.3in (286x62x8.65mm) 14.6x2.4x0.3in (372x62x8.65mm) / 18x2.4x0.3in (458x62x8.65mm)



GROUND SPIKE

For above grade mounting

MATERIAL	Powder Coated Aluminum
DIMENSION	Ø1.8 x 10.2in (Ø45 x H260mm)

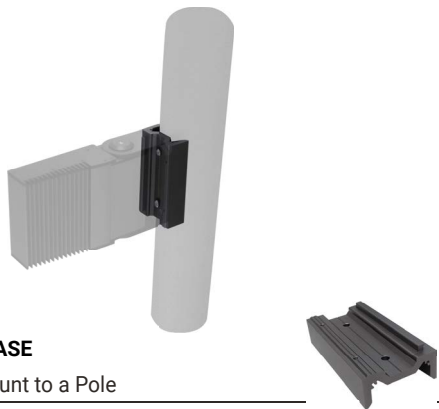

POLE MOUNT BASE

Base plate to mount to a Pole

MATERIAL	Anodized Aluminum
DIMENSION (LxWxH)	4.6x2.4x1.2in (116x62x31.15mm) / 8x2.4x1.2in (202x62x31.15mm) 11.3x2.4x1.2in (288x62x31.15mm) / 14.7x2.4x1.2in (374x62x31.15mm)

GS4 - MOUNTING ACCESSORIES

PART #	DESCRIPTION
GS4-JBOX	GS4 -JUNCTION BOX

ELECTRICAL DETAILS

RGB/RGBW | 120-277V AC

*Custom cord lengths available **GS4-JBOX required for daisy chain

