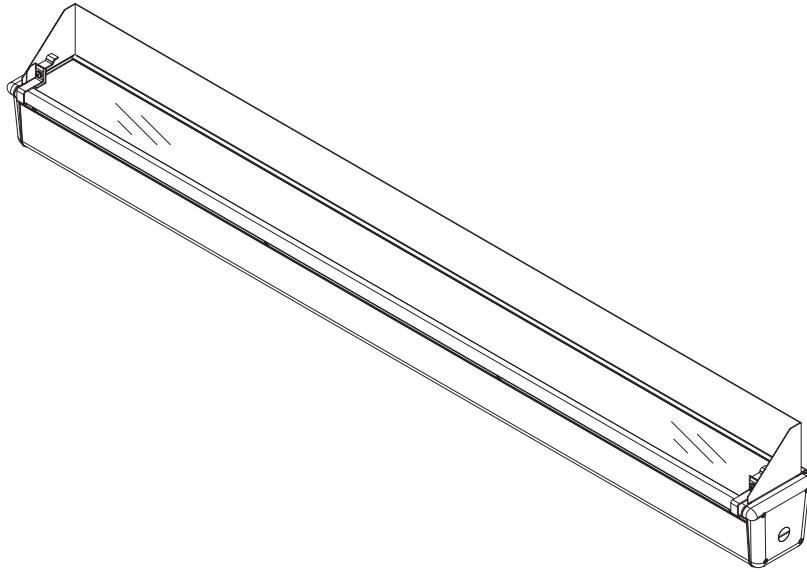
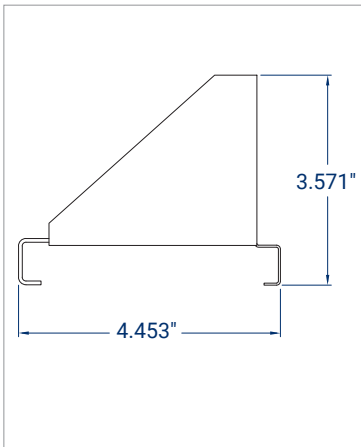
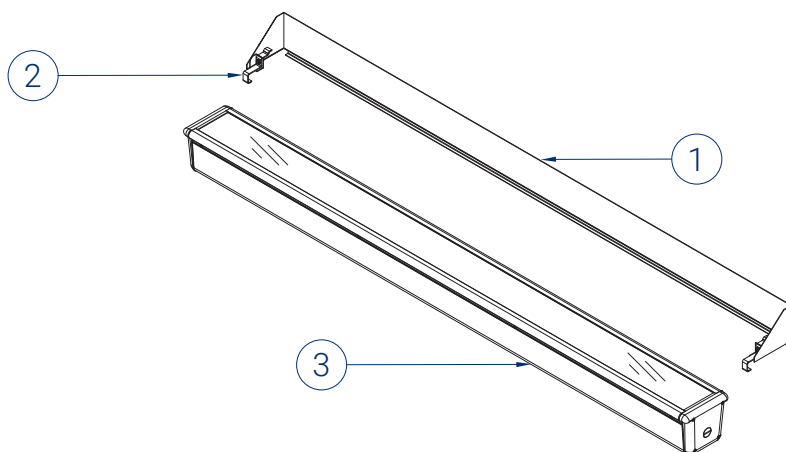


**WARNING!**


- READ THE PROVIDED INSTRUCTIONS PRIOR TO INSTALLING.
- INSTALLATION SHOULD BE CARRIED OUT BY QUALIFIED INSTALLERS.
- THE INSTALLER HAS THE FINAL RESPONSIBILITY FOR THE STRENGTH AND RIGIDITY OF THE WALL/CEILING STRUCTURE.
- A MINIMUM OF 2 PEOPLE REQUIRED WHEN INSTALLING LONG LENGTH FIXTURES.

**MOUNT DIMENSIONS****PACKAGE INCLUDES****ITEMS NEEDED (BY OTHERS)****ISOMETRIC / EXPLODED VIEW**


- (1) Glare Shield
- (2) Glare Shield Clip
- (3) Omegalux® 1200 Fixture

1 HOOK GLARE SHIELD(S) TO FIXTURE(S)

- CENTER THE GLARE SHIELD, THEN HOOK ONE SIDE TO THE FIXTURE.

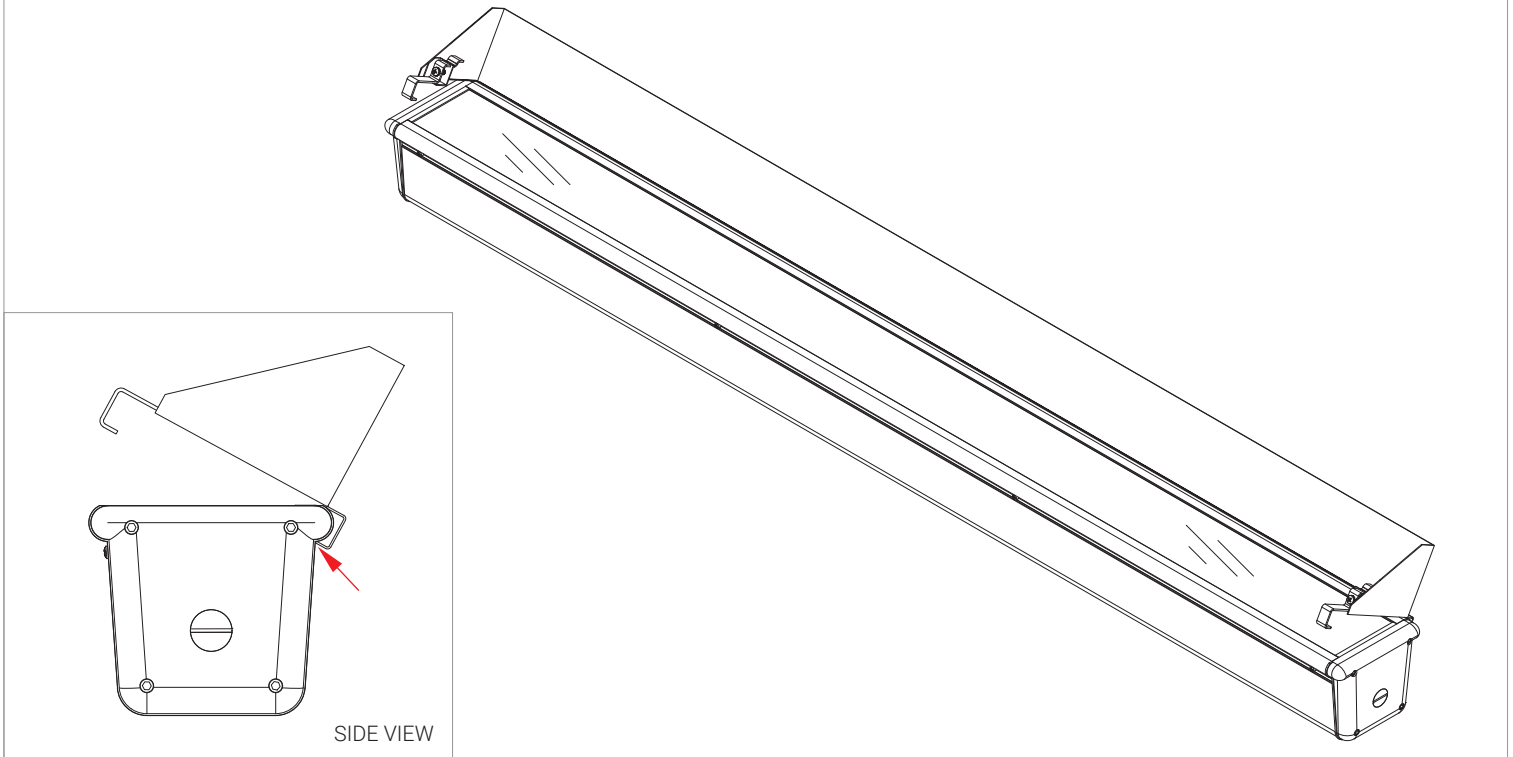**2 LAY GLARE SHIELD(S) FLAT ON THE FIXTURE(S)**

- ADJUST GLARE SHIELD CLIPS AND LAY DOWN FLAT TO FIT THE FIXTURE.

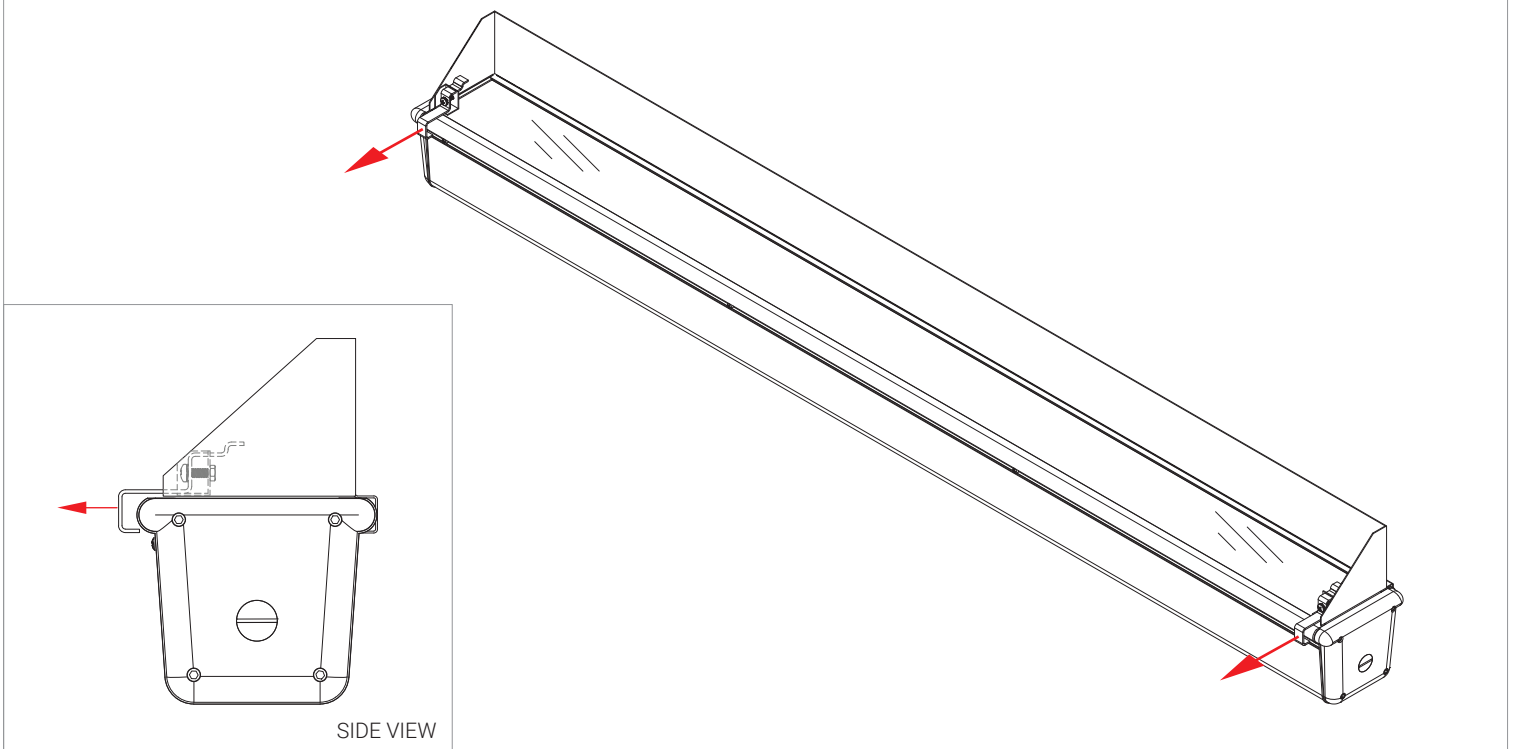

3 SECURE GLARE SHIELD(S)

- PUSH GLARE SHIELD CLIP INWARD AND TIGHTEN SCREW TO SECURE ONTO THE FIXTURE.

